

UTB MODEL







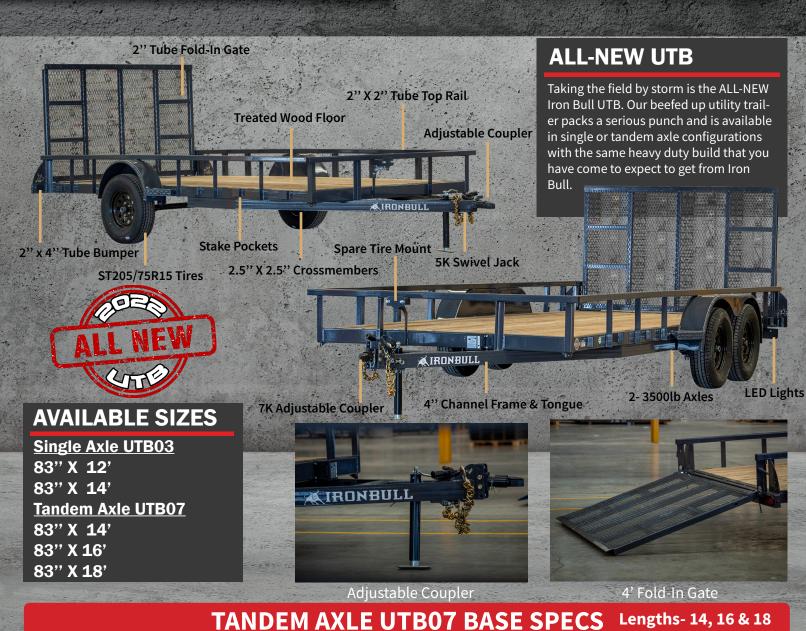

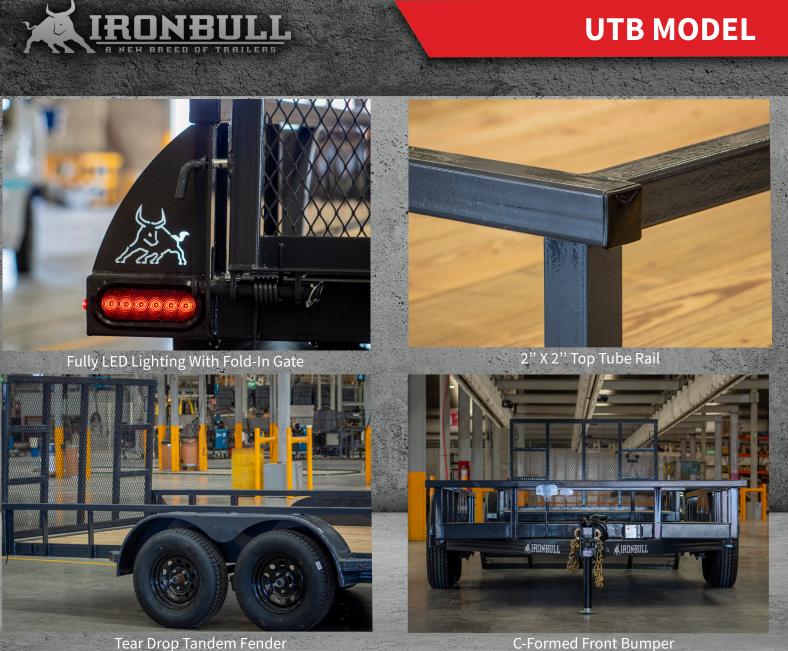

- 1 3500 Lb Axle (Idler)
- Channel 4" X 4.5LBS Frame & Tongue
- Angle 2.5" X 2.5" X 3/16" Crossmembers
- Tube 2" X 4" X 1/8" Rear Bumper
- Straight Deck (Std.)
- Tube Top Rail (Tube 2" X 2" X 1/8")
- 4" Tail Gate w/ Springs (Tube 2" X 2" X 1/8" & Angle 2 1/2" X 2 1/2" X 3/16")
- Self-Retained Gate Pins
- Spring 7/16" wire
- DP Fender Step
- 2" A-Frame Coupler

• 2 - 3500 Lb Axles (1 Elec Brake & 1 Idler)

- Channel 4" X 4.5LBS Frame & Tongue
- Angle 2.5" X 2.5" X 3/16" Crossmembers
- Tube 2" X 4" X 1/8" Rear Bumper
- Straight Deck (Std.)
- Tube Top Rail (Tube 2" X 2" X 1/8")
- 4" Tail Gate w/ Springs (Tube 2" X 2" X 1/8" & Angle 2 1/2" X 2 1/2" X 3/16")
- Self-Retained Gate Pins
- Spring 7/16" wire
- DP Fender Step
- Bumper Pull Adj 7k Coupler

- Jack Swivel Topwind 5k
- Teardrop Tandem Fender
- Treated Wood Floor
- C- Formed Front Bumper (Std.)
- Standard Wire Harness & 3/4" Lights
- Stake Pockets
- Tie Downs
- ST205/75 R15 (D) 8Ply
- Spare Tire Mount
- Grev
- Available 2nd Brake Axle

SINGLE AXLE UTB03 BASE SPECS Lengths- 14 & 16

- Jack Swivel Topwind 5k
- Teardrop Single Fender
- Treated Wood Floor
- C- Formed Front Bumper (Std.)
- Standard Wire Harness & 3/4" Lights
- Stake Pockets
- Tie Downs
- ST205/75 R15 (D) 8 Ply
- Spare Tire Mount
- Grey

5500 FM 38N, BROOKSTON, TX 75421