
FXG MODEL





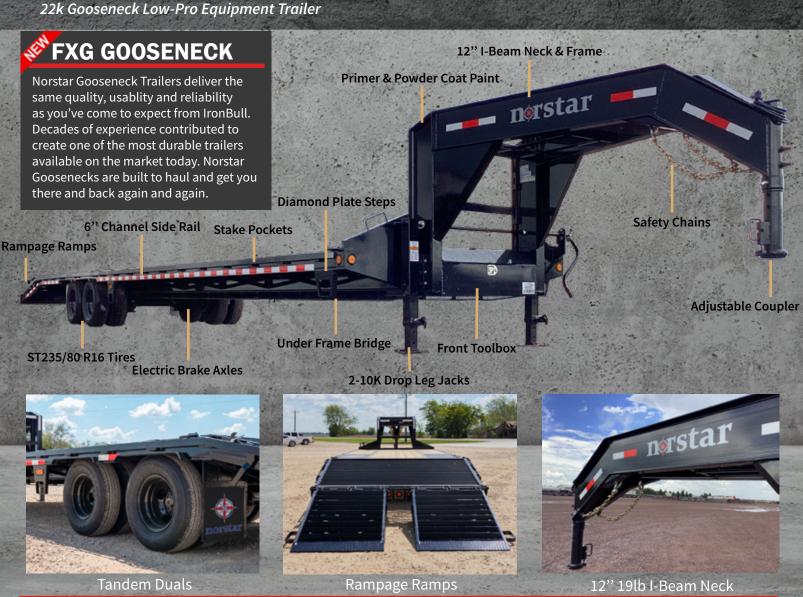

FXG BASE SPECS

- 2 10,000 Lb Electric Brake Axles
- 12" 19lb I-Beam Frame
- 12" 19lb I-Beam Neck
- 6" Channel Side Rail
- 16" Crossmembers (3" 3.5lb C-channel)
- 5 1/2" Torque Tube
- 102" X 5' Self Cleaning Dove Tail w/ Rampage Ramps
- Under Frame Bridge
- Front Tool Box
- Rub Rails w/Stake Pockets & Pipe Spools
- 2-5/16" Gooseneck Coupler Adjustable Rd. 25K

- Treated Wood Floor
- Spring Loaded Drop Leg Jack 2-10K
- D-Rings 3" x 5/8" Weld On (4ech)
- ST235/80 R16 LRE 10 Ply. (Dual)
- Spare Tire ST235/80 R16 LRE 10 Ply. (Dual)
- Mud Flaps with Norstar Logo (Dual Tires)
- Standard Wire Harness
- New Diamond Plate Steps
- Primer and Black Powder Coat
- One Year Warranty

FXG MODEL

uipment Trailer

the second se		22k Gooseneck Low-Pro Equ
FXG SIZES		
Model	Weight	
FXG0225102	6,790	
FXG0226102	6,962	
FXG0228102	7,297	
FXG0230102	7,606	
FXG0232102	7,893	
FXG0234102	8,179	
FXG0236102	8.400	The second s

Front Toolbox Between Neck



8,708

8,995

nørstar

FXG0238102 FXG0240102

LED Lighting

2-10k Electric Brake Axles



Spare Tire (Standard On Tandem Duals)

