



IRONBULL®

A NEW BREED OF TRAILERS



2024 TRAILERS



JOIN THE STAMPEDE!

TABLE OF CONTENTS



Iron Clad Warranty and Roadside Assistance	3
Dump Trailers	
DTB Model 7k-21k Dual 6" I-Beam Bumper Dump Trailer	8-9
DWB Model 14k 8" I-Beam Frame Dump Trailer	10-11
DTG Model 14k-21k Gooseneck Dump Trailer	12-13
DDP Model 14k-21k 96" Wide Deckover Bumper Pull Trailer	14-15
DDG Model 14k-21k 96" Wide Deckover Gooseneck Dump Trailer	16-17
DMG Model 22k 102" Wide Tandem Dual Dump	18-19
DHG Model 12" I Beam Gooseneck Dump	20-21
DBG Model 14k Gooseneck Roll Off Dump Trailer	22-23
DCB Model 14k General Duty Dump	24-25
DUB Model 4" Channel Dump Trailer	26-27
Equipment Trailers	
ETB Model 10k-21k 6" Channel Equipment Bumper Pull Trailer	30-31
EWB Model 14k 8" I-Beam Equipment Bumper Pull Trailer	32-33
ETG Model 14k-22k Channel Equipment Gooseneck Trailer	34-35
HD Deckover Gooseneck and Pintle Trailers	
FDG14 Model 14k 10" I-Beam Deckover Gooseneck	38-39
FDP14 Model 14k 10" I-Beam Pintle Equipment Trailer	40-41
FTG14 Model 14k 12" I-Beam Deckover Gooseneck	42-43
FHG22 Model 22k Gooseneck Low-Pro Hydraulic Dove Trailer	44-45
FLG22 Model 22k Gooseneck Low-Pro Equipment Trailer	46-47
FLP22 Model 22k Deckover Pintle Trailer	48-49
FLP50 Model Super HD Pintle Trailer	50-51
FXG22 Model 22k Tandem Dual Deckover	52-53
Tilt Trailers	
TWB Model Mini-Beam Tilt Trailer	56-57
TLB14 Model 10k-21k Low-Pro Bumper Pull Tilt Trailers	58-59
TDP14 Model 14k Deckover Tilt Pintle Trailer	60-61
Utility Trailers	
UTB Model 7k & 14k Utility Trailers	64-65
Accessories	
Trailer Parts Side Extensions, Jacks, Cold-Weather Wiring, Hydraulics, Add-Ons, Toolboxes, Tires	66-67



The North American Trailer Dealers Association is a professional business association in North America that serves the light and medium duty trailer dealers and brings them together as a unified team. For years, the trailer industry has struggled hard and waited patiently to gain financial strength, professional credibility and industry recognition. Now, the wait is finally over! By uniting the trailer dealers within a professional business association, NATDA is able to provide dealers with only the very best benefits, programs and education available.



The NATM Compliance Verification Program (CVP) is a mandatory program for all NATM member trailer manufacturers. This program involves multiple components, all of which are geared toward creating safer trailers and in turn, safer roadways.

All NATM trailer manufacturer members are required to successfully complete a compliance consultation. Once a member has done so, they are able to purchase and place NATM Compliance Decals on their trailers.

IRON CLAD WARRANTY



BEST IN CLASS TRAILER ✓
BEST IN CLASS WARRANTY ✓
FREE ROADSIDE ASSISTANCE ✓

Let's Roll

Roadside: 888-399-0327

Iron Bull trailers are some of the best in the market, and we are happy to provide our industry-best IronClad Warranty to back them up. Our manufacturer's warranty program covers structure and components, and even adds free 24-hour roadside assistance to every trailer standard. No service contracts, no hoops to jump through, and no hassles, just take your Iron Bull Trailer to any authorized dealer for fast and friendly service.

3 YEAR
Structural Coverage

2 YEAR
Component Coverage

2 YEAR
Free Roadside Assistance

Your Iron Bull trailer is warrantied to be free from structural defects for a period three years from the date of purchase.

This protection warrants every component (non-structural items) on your Iron Bull trailer to be free from defects for a period of two years from the date of purchase.

Each Iron Bull trailer is covered by a nationwide 24/7 roadside assistance program with benefits extending to the tow vehicle.

Roadside Assistance Details:

Each Iron Bull trailer is covered for a period of two years from the date of purchase with a free roadside assistance package. Benefits include:

- Flat Tire Changes
- Towing and Road Service (tow vehicle and trailer)
- Jump Starting
- Fluid Delivery (including fuel, hydraulic & coolant)
- Lock Out Service
- On the road and off road coverage
- Consumer and commercial coverage
- All benefits extend to the tow vehicle
- Included free on every Iron Bull Trailer

The program is simple to use:

- 1) Register your new Iron Bull trailer online at www.norstarwarranty.com
- 2) Have VIN no. and Plan Identifier available (found on trailer).
- 3) Call our toll-free 24/7 dispatch line at **888-399-0327**.
A service provider will assist in locating service provider.

Roadside: 888-399-0327


For full warranty details please refer to your owner's manual or visit www.norstarwarranty.com.



DUMP TRAILERS

DESIGNED FOR MULTI-PURPOSE USES, OUR DUMP TRAILERS ARE BUILT TOUGH AND PROVEN TO HANDLE ANY LOAD.

With a range of sizes, features, & materials, our best built dump trailers can meet the demands of any hauling job, making them a competent and reliable choice for anyone needing a dump trailer. We are known for our commitment to quality, innovation, & exceptional customer service. We produce high-quality dump trailers focusing on durability, versatility, & value.

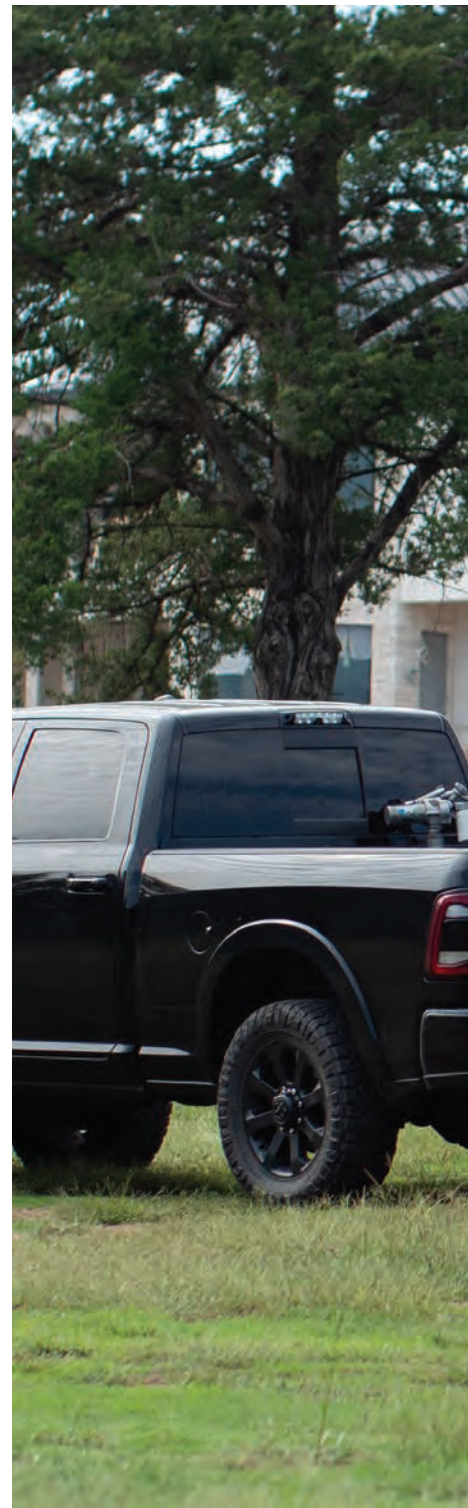

Pg. 6

DTB14

- 14k Dual 6" I-Beam Frame
- 10-16' Lengths
- 7,000-21,000 lbs GVWR



Pg. 8

DWB14

- 14k Mono 8" I-Beam Frame
- 14-16' Lengths
- 7,000 lbs GVWR



Pg. 10

DTG14

- 14k Gooseneck
- 12-16' Lengths
- 14,000-21,000 lbs GVWR



Pg. 12



Pg. 18



Pg. 20

DDP14

14k Deckover Bumper Pull

- 14-16' Lengths
- 14,000-21,000 lbs GVWR

DMG22

Tandem Dual Deckover

- 20' Length
- Up to 24,900 lbs GVWR

DBG14

14k Roll-Off

- 14-20' Lengths



MORE THAN JUST A RAIL™

Ironbull has elevated dump trailers with a redesigned Side Armor system. This upgraded sidewall design keeps our 24-inch, 10-gauge original construction, featuring an oversized break preventing bowing and ensuring unmatched side rigidity. Enhanced Side Armor introduces a fully enclosed top rail made of 11-gauge steel to safeguard against potential damage during side loading. Corner reinforcements have also been strengthened offering additional welding area to reinforce the dump box. With this advanced Side Armor system, 7 gauge flooring, and available bed runners, every Ironbull dump trailer boasts an industry-leading dump box, allowing you to concentrate on your tasks with confidence.



CHOOSING THE RIGHT DUMP TRAILER

The right dump trailer will not only meet your hauling needs, but it will also have the durability, capacity, and features necessary to handle the types of loads you typically work with. Dump trailers are essential for anyone in the construction, landscaping, or farming industry. They provide a reliable way to transport heavy materials or equipment, making them indispensable to any work site. Selecting the right dump trailer requires consideration of several key factors. Consider the size and weight of the loads you will be hauling. Determining the size and weight helps you choose a trailer with an appropriate payload capacity. Think about the type of material you will be hauling. Certain materials may require a specific type of dump trailer, such as one with a high-sided design or a low-profile model. Evaluate the terrain you will be driving on. A dump trailer with a heavy-duty suspension system may be necessary if you go on rough terrain. Look for features that will make loading and unloading more accessible, such as a hydraulic lift system or removable sides - saving you time and effort when using the trailer. Choose a trailer compatible with your vehicle - ensure the trailer's hitching system is compatible with your vehicle's hitch receiver.

BUMPER PULLS



DTB

14k Dual 6" I-Beam Frame

- 24" Side Armor Body Design
- 10' - 16' Lengths
- 7,000 - 21,000 lbs GVWR
- 7 Gauge Flooring
- 6" I - Beam Frame
- 10ga 18" or 24" Steel Sides
- Slide-In Ramps w/ Pin Tab
- 27" - 32" Deck Heights



DWB

14k Mono 8" I-Beam Frame

- 24 "Side Armor Body Design
- 14' - 16' Lengths
- 14,000 lbs GVWR
- 7 Gauge Flooring
- 8" I - Beam Frame
- 10ga 18" or 24" Steel Sides
- Slide-In Ramps w/ Pin Tab
- 29" Deck Height



DDP

14k Deckover Bumper Pull

- 10" I - Beam Frame
- 14' - 16' Lengths
- 14,000 - 21,000 lbs GVWR
- 10 Gauge Flooring
- 18" Fold Down Sides
- Slide-In Ramps
- 35" Deck Height

GOOSENECKS



DTG

14k Gooseneck

- 24" Side Armor Body Design
- 12 - 16' Lengths
- 14,000 - 21,000 lbs GVWR
- 12" I - Beam Neck & Risers
- 3 - Way Spreader Gate
- Slide-In Ramps w/ Pin Tab
- 32" Deck Height



DMG

Tandem Dual Deckover

- 20' Length
- Up to 24,900 lbs GVWR
- 12" I - Beam Frame, Neck & Risers
- Square Bottom Floor
- 48" 10ga Dump Sides
- Heavy Duty Slide-In Ramps
- 38" Deck Height



DBG

14k Roll-Off

- 14 - 20' Lengths
- Up to 20.7 Cu Yds Box Capacity
- Stackable Bins
- Full Front Toolbox
- 48" 10ga Dump Sides
- 20k Winch w Cable
- 34" Deck Height

DTB MODEL

Dual 6" I-Beam Dump Trailer



IRONBULL®

A NEW BREED OF TRAILERS



Strength where strength matters! Featuring the all new Side Armor™ body design, every DTB sits atop of a dual layer of 6" I-beam weighing in at 12 pounds per ft main frame construction. That's 24 lbs/ft of pure steel, putting maximum strength into the most critical part of your trailering system. Our 83" wide 14k bumper pull is by far our most popular model. With two 7k axles and tons of standard features, this model is a perfect fit for the contractor or weekend warrior.



BOX CAPACITY (CUBIC YARDS)

SIZE	BASE	3FT.	4FT.
60x10	2.8		
72x10	4.4		
72x12	5.3	8.0	10.7
83x12	6.1	9.2	12.3
83x14	7.2	10.8	14.3
83x16	8.2	12.3	16.4

STANDARD FEATURES

- New Side Armor Body Design
- Reinforced Top Rail
- New Fender Style
- New Rear Gate Latch System
- New Step
- Revised Toolbox & Front Jack Bracket
- New Slide-In Ramps W/ Pin Tab
- Dual 6" I-Beam Frame (24lbs/ft)
- 7 Gauge Steel Flooring on 83" Wide Models
- 4" Tubing Bed Frame
- Full Length Bed Runners & Ramp Pockets
- 10 Gauge 18" or 24" Steel Sides
- Standard Retractable Tarp Kit
- 10k Drop-Leg Jack
- 2 5/16" Adjustable Coupler
- 2 - 7k Cambered Brake Axles (8k & Triple 7 Available)
- Multi-leaf Slipper Spring Suspension
- Black Mod Wheels*
- Radial Tires
- Spare Tire Mount
- Slide-in Ramps
- Rear Support Stand Bracket
- Three-Way Spreader Gate
- Powdura Powder Coat & One Cure Primer
- Scissor Hoist with 516 Cylinder
- Double Acting Pump Unit w/ Gravity Down
- Flow Control Valve
- Locking Pump Box
- Standard Stake Pockets
- Weld On Diamond Plate Fenders
- Four Floor Mounted 5/8" D-Rings
- DOT Approved Lifetime LED Lighting
- Molded Sealed Harness with Resistors
- LED Voltage Indicator in Remote
- Built-In 5 amp Battery Charger
- 7-Way Receiver Female Plug w/ Adapter
- 32" Deck Height (27" on 5x10)

BUILD A QUOTE ONLINE AT NORSTARCOMPANY.COM

GRAB A BULL BY THE HORNS




BASE SPECS

WIDTH	LENGTH	GVWR	AXLES	TIRE/WHEEL	SIDES	WEIGHT
60	10	7,000	2 x 3,500 lb	205/75R15 5 Hole	18"	2,860
60	10	10,000	2 x 5,200 lb	225/75R16 6 Hole	18"	3,131
72	10	10,000	2 x 5,200 lb	225/75R16 6 Hole	24"	4,149
72	12	10,000	2 x 5,200 lb	225/75R16 6 Hole	24"	4,149
72	12	14,000	2 x 7,000 lb	235/80R16 8 Hole	24"	4,149
83	12	14,000	2 x 7,000 lb	235/80R16 8 Hole	24"	4,629
83	14	14,000	2 x 7,000 lb	235/80R16 8 Hole	24"	4,960
83	16	14,000	2 x 7,000 lb	235/80R16 8 Hole	24"	5,373
83	16	21,000	3 x 7,000 lb	235/80R16 8 Hole	24"	5,373

*WEIGHT OF UNITS ARE APPROXIMATES ONLY AND SUBJECT TO CHANGE DEPENDING ON OPTIONS



Full Length Bed Runners

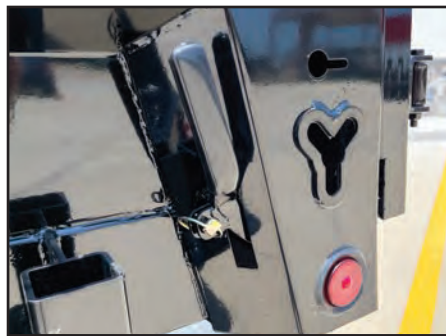

New Rear Gate Latch



Side Armor System

DTB OPTIONAL FEATURES

CODE DESCRIPTION

- V53 3 Stage Telescopic Cylinder
- 08ES2 Tandem 8k Axles
- S01 Rear Swivel Jack Stands
- S61 3' Side Walls
- S62 4' Side Walls
- S90 Solar Panel Charger
- R90 Wireless Remote
- W91 Cold Weather Harness
- J58 Hydraulic 12k Jack*

*If hydraulics is equipped



5500 FM 38N, BROOKSTON, TX 75421

DWB MODEL

8" I-Beam Dump Trailer



IRONBULL
A NEW BREED OF TRAILERS



8"
I-BEAM

Featuring the all new Side Armor™ body design, our DWB dump trailer makes hauling effortless. An 8" monoframe I-beam construction makes the unit 2" shorter than our standard DTB. Built with the same rugged user in mind as our DTB model, The DWB comes in standard configurations only, but should have all the options to satisfy the needs of any serious dump user.



BOX CAPACITY (CUBIC YARDS)

SIZE BASE

83x14 7.2

83x16 8.2



8" Monoframe & Traditional Crossmembers



Super-Sized Front Toolbox

BUILD A QUOTE ONLINE AT NORSTARCOMPANY.COM

GRAB A BULL BY THE HORNS

BASE SPECS

WIDTH	LENGTH	GVWR	AXLES	TIRE/WHEEL	FRAME	WEIGHT
83	14	14,000	2 x 7,000 lb	235/80R16 8 Hole	8" I-Beam	5,137
83	16	14,000	2 x 7,000 lb	235/80R16 8 Hole	8" I-Beam	5,202

*WEIGHT OF UNITS ARE APPROXIMATES ONLY AND SUBJECT TO CHANGE DEPENDING ON OPTIONS

STANDARD FEATURES

- New Side Armor Body Design
- Reinforced Top Rail
- New Fender Style
- New Rear Gate Latch System
- New Step
- Revised Toolbox & Front Jack Bracket
- New Slide-In Ramps W/ Pin Tab
- 8" I-Beam Frame & Tongue (10 lbs/ft)
- 4" Tubing Bed Frame
- 7 Gauge Steel Flooring
- 3 x 3/16" Channel Crossmembers
- 10 Gauge 24" Steel Sides
- Standard Retractable Tarp Kit
- Weld On Diamond Plate Fenders
- 10k Drop-Leg Jack
- 2 5/16" Adjustable Coupler
- 7k or 8k Cambered Brake Axles
- Multi-leaf Slipper Spring Suspension
- Black Mod Wheels*
- Radial Tires
- Spare Tire Mount
- Slide-in Ramps
- Rear Support Stand Bracket
- Three-Way Spreader Gate
- Powdura Powder Coat & One Cure Primer
- Scissor Hoist with 516 Cylinder
- Double Acting Pump Unit w/ Gravity Down
- Flow Control Valve
- Locking Pump Box
- Standard Stake Pockets
- Weld On Diamond Plate Fenders
- Four Floor Mounted 5/8" D-Rings
- DOT Approved Lighting
- Lifetime LED Lighting
- Molded Sealed Harness with Resistors
- LED Voltage Indicator in Remote
- Built-In 5 amp Battery Charger
- 7-Way Receiver Female Plug with Adapter
- 29" Deck Height



New Side Armor System



3 Way Spreader Gate



516 Scissor Hoist



7 Gauge Steel Flooring

5500 FM 38N, BROOKSTON, TX 75421

* Due to supply chain, features and options may change based on availability.

DTG MODEL

12" I-Beam Gooseneck Dump Trailer



IRONBULL[®]

A NEW BREED OF TRAILERS



BOX CAPACITY (CUBIC YARDS)

SIZE	BASE	3 FT	4 FT
83x12	6.1	9.2	12.3
83x14	7.2	10.8	14.3
83x16	8.2	12.3	16.4

Featuring the all new Side Armor™ body design, Iron Bull DTG model trailers are built to work. 12" I - Beam neck and risers, 14k - 21k of GVWR and 3" channel crossmembers with 16" centers. Top tier components come together with the most rugged construction on the market to deliver a dump trailer like no other.



Photo displays optional telescopic cylinder

STANDARD FEATURES

- New Side Armor Body Design
- Reinforced Top Rail
- New Fender Style
- New Rear Gate Latch System
- New Step
- New Slide-In Ramps W/ Pin Tab
- 12" I - Beam Neck and Risers
- 7 Gauge Steel Flooring
- 4" Tubing Bed Frame
- Full Length Bed Runners and Ramp Pockets
- 10 Gauge 24" Steel Sides
- Standard Retractable Tarp Kit
- Dual 10k Drop-Leg Jacks
- 2 5/16" Adjustable Coupler
- 7k Cambered Brake Axles
- Multi-leaf Slipper Spring Suspension
- Black Mod Wheels*
- Radial Tires
- Spare Tire Mount
- Rear Support Stand Bracket
- Three-Way Spreader Gate
- Powdura Powder Coat & One Cure Primer
- Scissor Hoist with 516 Cylinder
- Double Acting Pump Unit w/ Gravity Down
- Flow Control Valve
- Locking Pump Box
- Standard Stake Pockets
- Weld On Diamond Plate Fenders
- Four Floor Mounted 5/8" D-Rings
- DOT Approved Lifetime LED Lighting
- Molded Sealed Harness with Resistors
- LED Voltage Indicator in Remote
- Built-In 5 amp Battery Charger
- 7-Way Receiver Female Plug with Adapter
- 32" Deck Height

BUILD A QUOTE ONLINE AT NORSTARCOMPANY.COM

GRAB A BULL BY THE HORNS

BASE SPECS

WIDTH	LENGTH	GVWR	AXLES	TIRE/WHEEL	SIDES	WEIGHT
83	12	14,000	2 x 7,000 lb	235/80R16 8 Hole	24"	5,278
83	14	14,000	2 x 7,000 lb	235/80R16 8 Hole	24"	5,401
83	16	14,000	2 x 7,000 lb	235/80R16 8 Hole	24"	5,798
83	16	21,000	3 x 7,000 lb	235/80R16 8 Hole	24"	6,065

*WEIGHT OF UNITS ARE APPROXIMATES ONLY AND SUBJECT TO CHANGE DEPENDING ON OPTIONS

DTG OPTIONAL FEATURES

CODE	DESCRIPTION	CODE	DESCRIPTION
08ES2	Tandem 8k Axles	J55	2 Speed 10k Drop-Leg Jacks
D60	Deck Over Neck	J57	12k Hydraulic Jack*
S01	Rear Swivel Jack Stands	S90	Solar Panel Charger
S61	3' Side Walls	R90	Wireless Remote
S62	4' Side Walls	V53	3 Stage Telescopic Cylinder
W91	Cold Weather Harness		

*If hydraulics is equipped



Side Armor Body Design



Slide-In Ramps



Oversized Front Toolbox



3-Way Spreader Gate



New Fender Style



Full Length Bed Runners

Photos may include optional features.

5500 FM 38N, BROOKSTON, TX 75421

DDP MODEL

Deckover Dump with Fold Down Sides



Iron Bull is happy to offer one of the best expertly made deckover dumps on the market. Our DDP offers a raised deck to accommodate 10 gauge fold down sides and a bed width of 96". Each deckover is equipped standard with 10" I-Beam frame, 3" channel crossmembers, 10 gauge smooth steel floor, 2 5/16" couplers, a 10k Drop-Leg jack and more.

BOX CAPACITY (CUBIC YARDS)

SIZE	BASE
96x14	6.2
96x16	7.1



STANDARD FEATURES

- 10" x 12lb I-Beam Frame
- 2 5/16" Adjustable Coupler
- 3" Structural Crossmembers
- 10 Gauge Floor
- 18" Fold-Down Sides
- Multi-leaf Slipper Spring Suspension
- E-Z Lube Hubs
- 2 - 7k Electric Brake Axles
- Slide-in Ramps
- Cambered Spring Axles
- Three-Way Spreader Gate
- Standard Retractable Tarp Kit
- Locking Pump Box
- Built In 5 Amp Charger
- Standard Stake Pockets
- 10k Drop-Leg Jack
- Scissor Hoist with 520 Cylinder
- Four 5/8" D-Rings
- Double Acting Power Unit w/ Gravity Down
- Flow Control Valve
- Black Mod Wheels*
- 235/80R16 Radial Tires
- DOT Approved Lifetime LED Lighting
- LED Voltage Indicator in Remote
- Molded Sealed Harness with Resistors
- 7-Way Receiver Female Plug with Adapter
- Powdura Powder Coat & One Cure Primer
- 36" Deck Height

BUILD A QUOTE ONLINE AT NORSTARCOMPANY.COM

GRAB A BULL BY THE HORNS

BASE SPECS

WIDTH	LENGTH	GVWR	AXLES	TIRE/WHEEL	FRAME	WEIGHT
96	14	14,000	2 x 7,000 lb	235/80R16 8 Hole	8" I-Beam	4,762
96	16	14,000	2 x 7,000 lb	235/80R16 8 Hole	8" I-Beam	5,071
96	16	21,000	3 x 7,000 lb	235/80R16 8 Hole	8" I-Beam	5,423

*WEIGHT OF UNITS ARE APPROXIMATES ONLY AND SUBJECT TO CHANGE DEPENDING ON OPTIONS



96" Wide Deck, Standard Tarp



520 Scissor Hoist



Three Way Spreader Gate

DDP OPTIONAL FEATURES

CODE DESCRIPTION

- 08ES2 Tandem 8k Axles
- S90 Solar Panel Charger
- R90 Wireless Remote
- W91 Cold Weather Harness
- J58 1 - 12k Hydraulic Jack



*If hydraulics is equipped



36" Deck Height, 18" Fold Down Sides



Triple Axle Available

5500 FM 38N, BROOKSTON, TX 75421

DDG MODEL

Deckover GN Dump with Fold Down Sides



IRONBULL
A NEW BREED OF TRAILERS



520 Scissor Hoist



Our DDP features an elevated deck designed to accommodate 10-gauge fold-down sides and a bed width of 96". Every deckover comes standard with a robust 10" I-Beam frame, 3-inch channel crossmembers, a 10-gauge smooth steel floor, 2 - 5/16" couplers, a 3 way spreader gate, and other premium features, ensuring a high-quality and durable solution for your hauling needs.



BOX CAPACITY (CUBIC YARDS)

SIZE	BASE
96x14	8.3
96x16	9.5

STANDARD FEATURES

- 10" x 12lb I - Beam Frame
- 2 - 5/16" Adjustable Coupler
- 3" Structural Crossmembers
- 10 Gauge Floor
- 18" Fold-Down Sides
- Multi-leaf Slipper Spring Suspension
- E-Z Lube Hubs
- 2 - 7k Electric Brake Axles
- Standard Stake Pockets
- Cambered Spring Axles
- Three-Way Gate
- Standard Retractable Tarp Kit
- Slide-in Ramps
- 2 - 10k Drop-Leg Jack
- Scissor Hoist with 520 Cylinder
- Flow Control Valve
- Double Acting Power Unit
- Four 5/8" D-Rings
- Black Mod Wheels*
- 235/80R16 Radial Tires
- All Lighting DOT Approved
- Molded Sealed Harness with Resistors
- 7-Way Receiver Female Plug with Adapter
- Powdura Powder Coat & One Cure Primer
- 36" Deck Height

BUILD A QUOTE ONLINE AT NORSTARCOMPANY.COM

GRAB A BULL BY THE HORNS

* Due to supply chain, features and options may change based on availability.

BASE SPECS

WIDTH	LENGTH	GVWR	AXLES	TIRE/WHEEL	FRAME	WEIGHT
96	14	14,000	2 x 7,000 lb	235/80R16 8 Hole	10" I-Beam	5,180
96	16	14,000	2 x 7,000 lb	235/80R16 8 Hole	10" I-Beam	5,635
96	16	21,000	3 x 7,000 lb	235/80R16 8 Hole	10" I-Beam	5,780

*WEIGHT OF UNITS ARE APPROXIMATES ONLY AND SUBJECT TO CHANGE DEPENDING ON OPTIONS

DOG OPTIONAL FEATURES

CODE DESCRIPTION

- 08ES2 Tandem 8k Axles
- S90 Solar Panel Charger
- R90 Wireless Remote
- W91 Cold Weather Harness
- J57 2 - 12k Hydraulic Jacks*
- D60 Deck Over Neck

*If hydraulics is equipped



Three Way Spreader Gate



36" Deck Height, 18" Fold Down Sides



5500 FM 38N, BROOKSTON, TX 75421

Photos may include optional features.

DMG MODEL

24,900K Tandem Dual Square Bottom Dump



IRONBULL
A NEW BREED OF TRAILERS



Square Bottom Floor

Built after the DSG "Frankendump," this monster delivers all of the lifting power with its 3 stage 12 ton telescopic cylinder. With a newly designed dump floor that's squared you'll be able to load the biggest of equipment ever. Packed with some serious features, you'll be the talk of the job site.



BOX CAPACITY (CUBIC YARDS)

SIZE	BASE
102x20	25.19

STANDARD FEATURES

- 2 - 10,000 lb Premium Electric Brake Axles
- 12" 19lb I-Beam Frame
- 12" 19lb I-Beam Riser
- 12" 19lb I-Beam Neck
- 48" 10 Ga Dump Sides
- 25k 2 - 5/16" Adjustable Gooseneck Coupler
- 2 - 10k Drop Leg Jacks
- Front Full Tool Box
- Heavy Duty Suspension System
- 3 Stage Telescopic Cylinder (12 tons x 144")
- T80 Tarp System (Front Mount Galvanized Manual)
- Dual Mud Flaps
- Sealed Wiring Harness
- D-Rings 3 x 5/8" (8 Each)
- ST 235/80 R16 LRE 10 Ply
- Spare Tire ST 235/80 R16 LRE 10 Ply
- Stake Pockets
- Flow Control Valve
- 2" x 6" Top Rail & Up Right Tubing
- Side Step Plate & Ladder
- HD 16" x 96" Tubing Slide-in Ramps
- Primer Paint & Premium Grey Powder Coat
- 38" Deck Height

BUILD A QUOTE ONLINE AT NORSTARCOMPANY.COM

GRAB A BULL BY THE HORNS

OPTIONAL UPGRADE 12K AXLES FOR 24,900 GVWR



96" Long 2 x 3 1/4" Tubing Ramps



Heavy Duty Suspension System



Side Step Ladder & Barn Doors



T80 Manual Tarp System



12" 19 lb Frame, Neck & Risers



Locking Battery & Pump Box

5500 FM 38N, BROOKSTON, TX 75421

DHG MODEL

12" I-Beam Gooseneck Dump Trailer



IRONBULL®

A NEW BREED OF TRAILERS

SUPER SINGLE 10s

NEW Iron Bull DHG dump trailer beast models are built to work hard! With a 12" I-Beam frame, neck and risers, up to 22k of GVWR and 2 - 10lb spring axles, these top tier components come together with the most rugged construction on the market to deliver a dump trailer like no other!



STANDARD FEATURES

- 2 - 10,000 lb Spring Axles (2 Elec. Brakes)
- 12" I-Beam Frame
- 12" I-Beam Riser
- 12" I-Beam Neck
- 36" 10 ga. Dump Sides Std.
- ST235/75 R17.5 LRJ 18 Ply.
- Gooseneck Coupler 2 5/16 Adjustable Rd. 25k
- Slide-In Ramps 16" x 96" HD
- Diamond Plate Fenders (Weld On)
- Jack Spring Loaded Drop Leg 2-10k
- Telescopic 12 tons x 144"
- Tarp System (Front Mount)
- Standard Wiring Harness
- D-Rings 3" x 5/8" Weld On (4ech) Std.
- Spare Tire Mt. (Weld On)
- Side Step Plate
- Black Powder Coat
- 36" Deck Height

BUILD A QUOTE ONLINE AT NORSTARCOMPANY.COM

GRAB A BULL BY THE HORNS



3 Stage Telescopic Cylinder (12 tons x 144")



2 - 10k Drop Leg Jack



10k Super Single Spring Axles



3 Way Spreader Gate

5500 FM 38N, BROOKSTON, TX 75421

DBG MODEL

14K Roll-Off Dump Trailer



IRONBULL
A NEW BREED OF TRAILERS



48" 10GA Dump Sides

Our DBG is our first ever roll-off dump trailer. Standard with 2 - 7k axles, 12" I-beam and a 22k winch and cable system. All backed by our industry leading Iron Clad Warranty. NOW AVAILABLE IN 20'!



BOX CAPACITY (CUBIC YARDS)	
SIZE	BASE
83x14	14.5
83x16	16.6
83x20	20.7

STANDARD FEATURES

- 2 - 7,000 lb Axles Straight (2 Elec. Brakes)
- 10" I-Beam Frame & Neck
- 12" Risers
- 2" x 4" Tube Deck
- 4" x 8" Tube Rear Bumper
- Spare Tire Mount
- 25K 2-5/16" Adjustable Coupler
- Diamond Plate Fenders (Bolt On)
- 2-10k Spring Loaded Drop-Leg Jacks
- Side Step Plate
- Standard Wiring Harness
- ST235/80 R16 LRE 10 Ply.
- 22k Winch With Cable
- 14' to 20' Sizes Available
- Flow Control Valve
- Tool Box for Winch With 2 Batteries
- Safety Chain On Deck
- Front Tool Box
- TH-520 Scissor Hoist
- 6" Oval LED Lights
- 34" Deck Height

BUILD A QUOTE ONLINE AT NORSTARCOMPANY.COM

GRAB A BULL BY THE HORNS



TH-520 Scissor Hoist



Barn Doors



Stackable Bins



Roll Off Deck Attachment

RB BIN SPECIFICATIONS

- 2" x 4" Tube Frame
- 48" 10GA Dump Sides
- 59 3/4" x 83" (Width x Length)
- 10GA Reinforced Upper side
- 10GA Rigid Rail
- 1/4" Stacking Brackets
- 4 1/2" DIA Front & Rear Rollers
- Rear Barn Doors
- Stackable Bins
- Available in Black, Tan & Grey w/Primer Paint
- Front Mounted Tarp System
- 7" Stake Pockets
- 3" x 5/8" Weld-On D Rings

5500 FM 38N, BROOKSTON, TX 75421

ALL NEW DCB

14k General Duty Dump



Oversized Locking Front Toolbox



ALL NEW DCB

Norstar now offers a tandem axle 14k general duty dump trailer. This new dump boasts 14,000 GVWR with a 516 scissor hoist and can handle most any of your hauling needs. You can't beat the durability, versatility and value of this dump trailer. Designed with a 26" deck height which makes loading and unloading easy and efficient. Perfect for your everyday tasks!



STANDARD FEATURES

- 2 - 7,000 lb Axles Straight (2 Elec. Brakes F-Adj.)
- Slide-In Ramps 16" x 80"
- Scissor Hoist TH-516
- Tube 2" x 6" Frame
- Full Length Bed Runners
- 10 ga. Floor
- 18" 10 ga. Dump Sides
- Barn Door Gate
- ST235/80 R16 LRE 10 Ply.
- 2 5/16 Adjustable 14k Coupler
- Diamond Plate Fenders (Weld On)
- 10k Drop Leg Jack
- Tarp System (Front Mount)
- Lighting LED (OVAL 6" & 3/4" w/ Grommet)
- Sealed Wiring Harness
- D-Rings 3" x 5/8" Weld On (4ech) Std.
- Spare Tire Mount (Weld On)
- Ranch Gray Powder Coat
- Side Wall Board Caps Optional
- Standard Tarp
- Lockable Front Toolbox
- Power Up/Down + Gravity Hydraulics
- 26" Deck Height

BUILD A QUOTE ONLINE AT NORSTARCOMPANY.COM

GRAB A BULL BY THE HORNS

DCB

**VERSATILE & DURABLE
w/ UNBEATABLE VALUE**



516 Scissor Hoist



Barn Door Gate



26" Deck Height & 18" 10ga Sides



16" x 80" Slide-In Ramps



5500 FM 38N, BROOKSTON, TX 75421

DUB MODEL

4" Channel Dump Trailer



3500k Axles



Hydraulic Cylinder

Taking the field by storm is the Norstar DUB. This first ever utility dump trailer comes standard with a hydraulic cylinder, 4' fold-in gate, adjustable coupler with the same heavy duty build that you have come to expect to get from Iron Bull.



STANDARD FEATURES

- 1-3500 lb Axles (Idler)
- Tube 2" x 4" x 1/8" Rear Bumper
- Handle 3/8" x 5"
- Hydraulic Cylinder
- 12GA Steel Sides
- 48" Tail Gate (Tube 1" x 2" x 1/8" & 2" x 2" x 1/8")
- Spring 7/16" wire
- Diamond Plate Fenders
- 2" 7k Adjustable Coupler
- Flow Control Valve
- Jack Swivel Topwind 5k
- Standard Wire Harness & 3/4" Lights
- Front Toolbox
- Stake Pockets
- ST205/75 R15 (D) 8Ply
- Black Premium Primer and Paint
- 22" Deck Height

BUILD A QUOTE ONLINE AT NORSTARCOMPANY.COM

GRAB A BULL BY THE HORNS

BASE SPECS

MODEL	GVWR	AXLES	TIRE/WHEEL	TONGUE	WEIGHT
DUB6010031	3,500	1 x 3,500 lb	205/75R15 8 Ply	3" Channel	1,146



Front Toolbox



12GA Steel Sides



48" Fold-In Gate



5500 FM 38N, BROOKSTON, TX 75421



EQUIPMENT TRAILERS

DESIGNED FOR DEPENDABILITY,
EFFICIENCY AND STRENGTH FOR
TOUGH JOBS

Equipment trailers are used to haul heavy equipment and machinery, a great fit for work or play. Expert craftsmanship combined with top-tier components ensure you have an effortless tow. Boost your job's efficiency and success by partnering with Ironbull for your trailer needs.





Pg. 26



Pg. 28



Pg. 30

ETB

6" Channel Equipment

- 16 - 26' Lengths
- 10,000 - 14,000 lbs GVWR

EWB

14k & 16k Mini Beam Hauler

- 18 - 24' Lengths
- 14,000 - 16,000 lbs GVWR

ETG

14k & 21k Equipment Gooseneck

- 20 - 44' Lengths
- 14,000 - 21,000 lbs GVWR

ETB MODEL

6" Channel Equipment Trailer



IRONBULL®

A NEW BREED OF TRAILERS



The Iron Bull ETB has 14,000 lbs of Gross Vehicle Weight Rating ensure you have enough capacity for your heaviest loads, and expert craftsmanship combined with top-tier components ensure you have an effortless tow. Countless configurations ensure you can get a fit for any job.



STANDARD FEATURES

- 5", 6" or 8" Channel Tongue & Frame
- 2 5/16" Adjustable Coupler
- 3" Structural Channel Crossmembers
- 2.5 x 2.5 Front Bumper Rail
- Rub Rail & Stake Pockets
- Removable Diamond Plate Fenders
- Cambered Brake Axles
- 2 Electric Brake Axles
- Multi-leaf Slipper Spring Suspension
- Black Mod Wheels*
- 10k Drop-Leg Jack (7k on 5,500 lb axles)
- 18" x 5' Slide-in Ramps
- Treated Pine 2" x 8" Floor
- 4 Standard 3" D-Rings
- Radial Tires (sizes on p.17)
- Lifetime LED Lighting
- All Lighting DOT Approved
- Molded Sealed Harness with Resistors
- 7-Way Receiver Female Plug with Adapter
- Powdura Powder Coat & One Cure Primer
- 25" Deck Height

BUILD A QUOTE ONLINE AT NORSTARCOMPANY.COM

GRAB A BULL BY THE HORNS

BASE SPECS


WIDTH	LENGTH	GVWR	AXLES	TIRE/WHEEL	TONGUE	WEIGHT
83	16	9,990	2 x 5,200 lb	225/75R15 6 Hole	5" Channel	2,535
83	18	9,990	2 x 5,200 lb	225/75R15 6 Hole	5" Channel	2,579
83	20	9,990	2 x 5,200 lb	225/75R15 6 Hole	5" Channel	2,605
83	16	14,000	2 x 7,000 lb	235/80R16 8 Hole	6" Channel	2,646
83	18	14,000	2 x 7,000 lb	235/80R16 8 Hole	6" Channel	2,888
83	20	14,000	2 x 7,000 lb	235/80R16 8 Hole	6" Channel	3,042
83	22	14,000	2 x 7,000 lb	235/80R16 8 Hole	6" Channel	3,150
83	24	14,000	2 x 7,000 lb	235/80R16 8 Hole	8" Channel	3,704
83	26	14,000	3 x 7,000 lb	235/80R16 8 Hole	8" Channel	2,960

*WEIGHT OF UNITS ARE APPROXIMATES ONLY AND SUBJECT TO CHANGE DEPENDING ON OPTIONS

ETB OPTIONAL FEATURES

CODE DESCRIPTION

- 07ES3 Third Spring Axle (Three Brake Axles) 24'+
- 08ES2 Tandem 8k Axles
- 02 102" Wide Deck (per ft)
- D06 2' Dove Tail & Slide In Ramps
- D04 2' Dove & 5' Stand-Up Ramps
- D07 3' Dove & Rampage Ramps
- E02 Steel Floor (per ft)
- G01 Fork Holders
- U50 Winch Plate 1/2"
- W91 Cold Weather Harness
- S02 Rear Supports (5k Swivel Jacks)
- T46 Front Toolbox

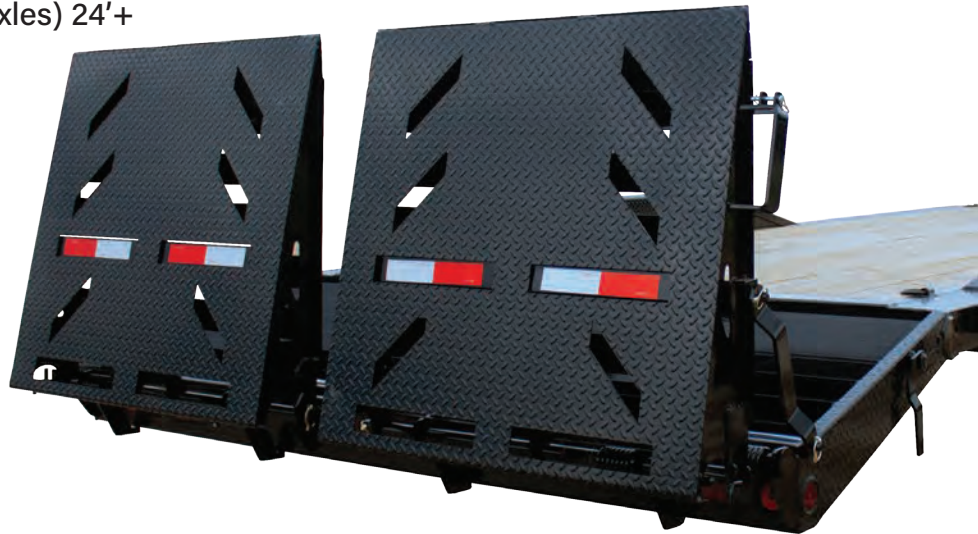

102" Wide



Steel Floor



Stand-Up Ramps

Photos may include optional features.

5500 FM 38N, BROOKSTON, TX 75421

EWB MODEL

8" I-Beam Equipment Trailer



8" I-BEAM

The Iron Bull EWB is available in 14,000 or 16,000 GVWR. The super-sized front toolbox provides you with an organized storage solution that eliminates clutter and reduces the risk of misplaced or lost tools. Standard with an 8" I-Beam frame and tongue, this equipment hauler can get the job done!



NOW AVAILABLE IN 102" WIDE!



SUPER-SIZED FRONT TOOLBOX



8" I-BEAM FRAME & RUB RAILS

BUILD A QUOTE ONLINE AT NORSTARCOMPANY.COM

GRAB A BULL BY THE HORNS

BASE SPECS

WIDTH	LENGTH	GVWR	AXLES	TIRE/WHEEL	TONGUE	WEIGHT
83	18	14,000	2 x 7,000 lb	235/80R16 8 Hole	8" I-Beam	3,175
83	20	14,000	2 x 7,000 lb	235/80R16 8 Hole	8" I-Beam	3,225
83	22	14,000	2 x 7,000 lb	235/80R16 8 Hole	8" I-Beam	3,417
83	20	16,000	2 x 8,000 lb	235/80R16 8 Hole	8" I-Beam	3,660
83	22	16,000	2 x 8,000 lb	235/80R16 8 Hole	8" I-Beam	3,748
83	24	16,000	2 x 8,000 lb	235/80R16 8 Hole	8" I-Beam	3,968

*WEIGHT OF UNITS ARE APPROXIMATES ONLY AND SUBJECT TO CHANGE DEPENDING ON OPTIONS

STANDARD FEATURES

- Slide-in, Stand-up Ramps or Rampage Ramps
- 8" I-Beam Frame & Tongue (10 lbs/ft)
- 14,000 lb GVWR
- Tandem 7k Electric Brake Axles
- E-Z Lube Hubs
- 235/80 R16 Radial Tires
- Super-Sized Front Toolbox
- 10k Drop-Leg Bolt-On Jack
- 2" x 8" Treated Lumber Flooring
- Black Mod Wheels*
- 8 Weld-On D-Rings
- Removable 14Ga Diamond Plate Fenders
- 3" Structural Crossmembers on 16" Centers
- Integrated Tie-Downs on Front Bump Rail
- Weld-On 3/8" Safety Chains
- 5 Position 2 5/16" Ball Coupler
- Lifetime LED Stop, Signal, Marker, & License Plate Lights
- 6 Leaf Spring Suspension
- DOT Reflective Tape
- Electric Breakaway Kit with Charger
- All Lighting DOT Approved
- Molded Sealed Harness
- Powdura Powder Coat & One Cure Primer
- 27" Deck Height



Stand-up Ramps



8k Available



Rampage Ramps



HD Stand-up Ramps



102" Wide Available



Super-Sized Front Toolbox

Photos may include optional features.

5500 FM 38N, BROOKSTON, TX 75421

* Due to supply chain, features and options may change based on availability.

ETG MODEL

Gooseneck Equipment Trailer



IRONBULL
A NEW BREED OF TRAILERS



Add some versatility to your fleet with our 14k Gooseneck. With two 7k axles and tons of standard features, Iron Bull equipment goosenecks are a great addition to any farm or jobsite. With tons of options, meet the Jack of all trades.



Deck Heights:
6" Channel Frame - 25"
8" Channel Frame - 27"
10" Channel Frame - 29"

STANDARD FEATURES

- 10" I-Beam Neck and 12" Risers
- 2 5/16" Adjustable Coupler
- 3" Structural Channel Crossmembers
- Rub Rail and Stake Pockets
- Removable Diamond Plate Fenders (83" wide)
- Cambered Brake Axles
- Multi-leaf Slipper Spring Suspension
- E-Z Lube Hubs
- 2 Electric Brake Axles
- 5' Slide-in Ramps
- 2 -10k Drop-Leg Jacks
- Treated Pine 2"x 8" Floor
- 4 Standard 3" D-Rings
- Black Mod Wheels*
- Locking Front Toolbox
- 235/80R16 Radial Tires
- Lifetime LED Lighting
- All Lighting DOT Approved
- Molded Sealed Harness with Resistors
- 7-Way Receiver Female Plug with Adapter
- Powdura Powder Coat & One Cure Primer
- 25" Deck Height (27" on ETG21)

BUILD A QUOTE ONLINE AT NORSTARCOMPANY.COM

GRAB A BULL BY THE HORNS

BASE SPECS

WIDTH	LENGTH	GVWR	AXLES	TIRE/WHEEL	TONGUE	WEIGHT
83	20	14,000	2 x 7,000 lb	235/80R16 8 Hole	6" Channel	3,770
83	22	14,000	2 x 7,000 lb	235/80R16 8 Hole	6" Channel	3,770
83	24	14,000	2 x 7,000 lb	235/80R16 8 Hole	8" Channel	4,020
83	26	14,000	2 x 7,000 lb	235/80R16 8 Hole	8" Channel	4,270
83	28	14,000	2 x 7,000 lb	235/80R16 8 Hole	8" Channel	4,691
83	30	14,000	2 x 7,000 lb	235/80R16 8 Hole	8" Channel	4,770
83	32	14,000	2 x 7,000 lb	235/80R16 8 Hole	10" Channel	5,020
83	32	21,000	3 x 7,000 lb	235/80R16 8 Hole	10" Channel	5,156
83	34	21,000	3 x 7,000 lb	235/80R16 8 Hole	10" Channel	6,375
83	36	21,000	3 x 7,000 lb	235/80R16 8 Hole	10" Channel	6,600
83	38	21,000	3 x 7,000 lb	235/80R16 8 Hole	10" Channel	6,900
83	40	21,000	3 x 7,000 lb	235/80R16 8 Hole	10" Channel	7,400
83	42	21,000	3 x 7,000 lb	235/80R16 8 Hole	10" Channel	7,620
83	44	21,000	3 x 7,000 lb	235/80R16 8 Hole	10" Channel	7,845

*WEIGHT OF UNITS ARE APPROXIMATES ONLY AND SUBJECT TO CHANGE DEPENDING ON OPTIONS

ETG OPTIONAL FEATURES

CODE DESCRIPTION

- 08ES2 Tandem 8k Axles
- 02 102" Wide Deck (per ft)
- D06 2' Dove Tail & Slide In Ramps
- D08 4' Dove Tail & Slide In Ramps
- D04 2' Dove & 5' Stand-Up Ramps
- D13 4' Dove & Rampage Ramps
- E02 Steel Floor (per ft)
- G01 Fork Holders
- J55 2 Speed Drop-Leg Jacks
- U52 Winch Plate 1/2" (in neck)
- W91 Cold Weather Harness
- S02 Rear Supports (5k Swivel Jacks)
- D60 Deck Over Neck



102" Wide, Triple Axle



Rampage Ramps



7k Tandem Axles

5500 FM 38N, BROOKSTON, TX 75421



DECKOVER TRAILERS

DESIGNED FOR EASE OF USE AND DURABILITY FOR ANY LOAD. WITH THEIR OPEN-TOP DESIGN, YOU CAN EASILY ACCESS THE CARGO AREA FOR EFFORTLESS LOADING AND UNLOADING.

If you're looking for a reliable and versatile trailer to help with your hauling needs, a deckover trailer is a great option. Deckover trailers are great for hauling wide loads. The cargo area can be adjusted to accommodate different sizes and shapes of items. They are ideal for transporting oversized objects that wouldn't fit on regular trailers.



Pg. 34



Pg. 36



Pg. 38

FDG14

14k 10" I-Beam Gooseneck

- 20 - 32' Lengths
- 14,000 lbs GVWR

FDP14

14k 10" I-Beam Pintle

- 16 - 28' Lengths
- 14,000 lbs GVWR

FTG14

14k 12" I-Beam Gooseneck

- 20 - 40' Lengths
- 14,000 - 21,000 lbs GVWR



Pg. 40

FHG22

22k Gooseneck Hydraulic Dove

- 28 - 40' Lengths
- 22,000 lbs GVWR



Pg. 42

FLG22

HD Low Pro Gooseneck

- 20 - 40' Lengths
- 22,000 lbs GVWR



Pg. 44

FLP22

HD Low Pro Pintle

- 20 - 40' Lengths
- 22,000 lbs GVWR

FDG14 MODEL

14k 10" I-Beam Deckover Gooseneck



IRONBULL
A NEW BREED OF TRAILERS



Our FDG14 Gooseneck features a 10" I-Beam frame and neck. Our deckover goosenecks come standard with a long list of great features to get your day-to-day tasks complete. See our FTG model for 12" I-Beam frame and longer length decks.



STANDARD FEATURES

- 10" x 12lb I-Beam Frame
- 2 5/16" Adjustable Coupler
- 3" Structural Channel Crossmembers
- 6" Tubing Outer Rails
- Rub Rail, Stake Pockets & Pipe Spools
- Diamond Plate Fender Plates
- Cambered Spring Axles
- Multi-leaf Slipper Spring Suspension
- Treated Pine 2" x 8" Floor
- 2 Electric Brake Axles
- Dual Stirrup Steps
- 2 - 10k Drop-Leg Jacks
- 8' Slide-in Ramps
- 4 Standard 3" D-Rings
- Black Mod Wheels*
- 235/80R16 Radial Tires
- Lifetime LED Lighting
- All Lighting DOT Approved
- 7-Way Receiver Female Plug with Adapter
- Powdura Powder Coat & One Cure Primer
- 34" Deck Height

BUILD A QUOTE ONLINE AT NORSTARCOMPANY.COM

GRAB A BULL BY THE HORNS

BASE SPECS

WIDTH	LENGTH	GVWR	AXLES	TIRE/WHEEL	FRAME	WEIGHT
102	20	14,000	2 x 7,000 lb	235/80R16 8 Hole	10" (12lb/ft)	4,460
102	22	14,000	2 x 7,000 lb	235/80R16 8 Hole	10" (12lb/ft)	5,354
102	24	14,000	2 x 7,000 lb	235/80R16 8 Hole	10" (12lb/ft)	4,968
102	25	14,000	2 x 7,000 lb	235/80R16 8 Hole	10" (12lb/ft)	5,230
102	26	14,000	2 x 7,000 lb	235/80R16 8 Hole	10" (12lb/ft)	5,315
102	28	14,000	2 x 7,000 lb	235/80R16 8 Hole	10" (12lb/ft)	5,825
102	30	14,000	2 x 7,000 lb	235/80R16 8 Hole	10" (12lb/ft)	5,960
102	32	14,000	2 x 7,000 lb	235/80R16 8 Hole	10" (12lb/ft)	6,146

*WEIGHT OF UNITS ARE APPROXIMATES ONLY AND SUBJECT TO CHANGE DEPENDING ON OPTIONS

FOG14 OPTIONAL FEATURES

CODE	DESCRIPTION
08ES2	2 - 8,000 lb Axles (2 Elec. Brakes)
D30	5' Dove & 5' Rampage Ramps*
E02	Steel Floor (per ft)
J55	2 Speed Drop-Leg Jacks
U52	Winch Plate 1/2" (in neck)
D60	Deck Over Neck

* Only available on 25' models and up



Photos may include optional features.

5500 FM 38N, BROOKSTON, TX 75421

FDP14 MODEL

14k 10" I-Beam Pintle Equipment Trailer



IRONBULL
A NEW BREED OF TRAILERS



Our FDP14 Deckover Pintle features a 10" I-Beam frame and tongue. Our traditional deckovers come standard with 2-7k axles, 10k jacks, treated pine floor, 33" deck height, lifetime LED lighting, 8' Slide-in Ramps and more.



STANDARD FEATURES

- 10" I-Beam Frame and Tongue
- 2 5/16" Adjustable Coupler
- 3" Structural Crossmembers
- Deck Height 33"
- Rub Rail, Stake Pockets & Pipe Spools
- 2 Electric Brake Axles
- Cambered Spring Axles
- E-Z Lube Hubs
- Multi-leaf Slipper Spring Suspension
- Full 102' Wide Deckover
- 8' Slide-in Ramps
- Dual Stirrup Steps
- 10k Drop-Leg Jack
- Treated Pine 2" x 8" Floor
- 4 Standard 3" D-Rings
- Black Mod Wheels*
- 235/80R16 Radial Tires
- Lifetime LED Lighting
- All Lighting DOT Approved
- Molded Sealed Harness with Resistors
- 7-Way Receiver Female Plug with Adapter
- Powdura Powder Coat & One Cure Primer
- 33" Deck Height

BUILD A QUOTE ONLINE AT NORSTARCOMPANY.COM

GRAB A BULL BY THE HORNS

BASE SPECS

WIDTH	LENGTH	GVWR	AXLES	TIRE/WHEEL	FRAME	WEIGHT
102	16	14,000	2 x 7,000 lb	235/80R16 8 Hole	10" (12lb/ft)	5,294
102	18	14,000	2 x 7,000 lb	235/80R16 8 Hole	10" (12lb/ft)	3,325
102	20	14,000	2 x 7,000 lb	235/80R16 8 Hole	10" (12lb/ft)	4,400
102	22	14,000	2 x 7,000 lb	235/80R16 8 Hole	10" (12lb/ft)	4,400
102	24	14,000	2 x 7,000 lb	235/80R16 8 Hole	10" (12lb/ft)	4,700
102	25	14,000	2 x 7,000 lb	235/80R16 8 Hole	10" (12lb/ft)	4,604
102	26	14,000	2 x 7,000 lb	235/80R16 8 Hole	10" (12lb/ft)	4,700
102	28	14,000	2 x 7,000 lb	235/80R16 8 Hole	10" (12lb/ft)	5,324

*WEIGHT OF UNITS ARE APPROXIMATES ONLY AND SUBJECT TO CHANGE DEPENDING ON OPTIONS

FOPI4 OPTIONAL FEATURES

CODE	DESCRIPTION
07ES3	Third Spring Axle (Three Electric Brakes)
08ES2	2 - 8,000 lb Axles (2 Elec. Brakes)
D30	5' Dove & 5' Rampage Ramps*
E02	Steel Floor (per ft)
J55	2 Speed Drop-Leg Jacks
U50	Winch Plate (Floor)
E04	Rough Oak Flooring (per ft.)
T46	Tongue Mount Toolbox

* Only available on 25' models and up



Photos may include optional features.

5500 FM 38N, BROOKSTON, TX 75421

FTG14 MODEL

14k 12" I-Beam Deckover Gooseneck



IRONBULL
A NEW BREED OF TRAILERS



Our FTG14 Gooseneck features a 12" I-Beam frame and neck. The heavier frame and structure allow for longer lengths and triple axle configurations in comparison to our FDG14 model that feature a 10" I-Beam frame and neck.



STANDARD FEATURES

- 12" x 14lb I-Beam Frame
- 2 5/16" Adjustable Coupler
- 3" Structural Channel Crossmembers
- 6" Tubing Outer Rails
- Rub Rail, Stake Pockets & Pipe Spools
- Diamond Plate Fender Plates
- Cambered Spring Axles
- Multi-leaf Slipper Spring Suspension
- Treated Pine 2" x 8" Floor
- 2 Electric Brake Axles
- Dual Stirrup Steps
- 2 - 10k Drop-Leg Jacks
- 8' Slide-in Ramps
- 4 Standard 3" D-Rings
- Black Mod Wheels*
- 235/80R16 Radial Tires
- Lifetime LED Lighting
- All Lighting DOT Approved
- 7-Way Receiver Female Plug with Adapter
- Powdura Powder Coat & One Cure Primer
- 38" Deck Height

BUILD A QUOTE ONLINE AT NORSTARCOMPANY.COM

GRAB A BULL BY THE HORNS

BASE SPECS

WIDTH	LENGTH	GVWR	AXLES	TIRE/WHEEL	TONGUE	WEIGHT
102	20	14,000	2 x 7,000 lb	235/80R16 8 Hole	12" (14lb/ft)	4,240
102	22	14,000	2 x 7,000 lb	235/80R16 8 Hole	12" (14lb/ft)	4,710
102	24	14,000	2 x 7,000 lb	235/80R16 8 Hole	12" (14lb/ft)	5,180
102	25	14,000	2 x 7,000 lb	235/80R16 8 Hole	12" (14lb/ft)	5,760
102	26	14,000	2 x 7,000 lb	235/80R16 8 Hole	12" (14lb/ft)	6,120
102	28	14,000	2 x 7,000 lb	235/80R16 8 Hole	12" (14lb/ft)	6,360
102	30	14,000	2 x 7,000 lb	235/80R16 8 Hole	12" (14lb/ft)	6,730
102	32	14,000	2 x 7,000 lb	235/80R16 8 Hole	12" (14lb/ft)	6,930
102	34	14,000	2 x 7,000 lb	235/80R16 8 Hole	12" (14lb/ft)	7,078
102	36	14,000	2 x 7,000 lb	235/80R16 8 Hole	12" (14lb/ft)	7,256
102	38	21,000	3 x 7,000 lb	235/80R16 8 Hole	12" (14lb/ft)	7,500
102	40	21,000	3 x 7,000 lb	235/80R16 8 Hole	12" (14lb/ft)	8,189

*WEIGHT OF UNITS ARE APPROXIMATES ONLY AND SUBJECT TO CHANGE DEPENDING ON OPTIONS

FTG14 OPTIONAL FEATURES

CODE DESCRIPTION

- 07ES3 Third Spring Axle (Three Electric Brakes)
- 08ES2 2 - 8,000 lb Axles (2 Elec. Brakes)
- D30 5' Dove & 5' Rampage Ramps*
- E02 Steel Floor (per ft)
- J55 2 Speed Drop-Leg Jacks
- U52 Winch Plate 1/2" (in neck)
- E04 Rough Oak Flooring (per ft.)
- D60 Deck Over Neck

* Only available on 25' models and up



Photos may include optional features.

5500 FM 38N, BROOKSTON, TX 75421

FHG22 MODEL

22k Gooseneck Hydraulic Dove Trailer



Our FHG comes equipped with our patented revolutionary design of the traditional hydraulic dove tail and is sure to be the biggest workhorse in your stable.



STANDARD FEATURES

- 12" I-Beam Frame and Neck (19 lbs/ft)
- 2 5/16" Adjustable Coupler
- 3" Structural Crossmembers
- Rub Rail, Stake Pockets & Pipe Spools
- HDSS Standard
- 2-10k Electric Brake Axles
- Multi-leaf Slipper Spring Suspension
- E-Z Lube Hubs
- Standard Torque Tube & Pipe Bridge
- Powdura Powder Coat & One Cure Primer
- Spare Tire & Mount
- 2 - 10k Drop-Leg Jacks
- Treated Pine 2" x 8" Floor
- 4 Standard 3" D-Rings
- Black Mod Wheels*
- 235/80R16 Radial Tires
- Lifetime LED Lighting
- All Lighting DOT Approved
- Molded Sealed Harness with Resistors
- 7-Way Receiver Female Plug with Adapter
- 32" Deck Height

BUILD A QUOTE ONLINE AT NORSTARCOMPANY.COM

GRAB A BULL BY THE HORNS

BASE SPECS

WIDTH	LENGTH	GVWR	AXLES	TIRE/WHEEL	FRAME	WEIGHT
102	28	22,000	2 x 10,000 lb	235/80R16 8 Hole	12" (19lb/ft)	7,620
102	30	22,000	2 x 10,000 lb	235/80R16 8 Hole	12" (19lb/ft)	7,945
102	32	22,000	2 x 10,000 lb	235/80R16 8 Hole	12" (19lb/ft)	8,105
102	34	22,000	2 x 10,000 lb	235/80R16 8 Hole	12" (19lb/ft)	9,490
102	36	22,000	2 x 10,000 lb	235/80R16 8 Hole	12" (19lb/ft)	9,690
102	38	22,000	2 x 10,000 lb	235/80R16 8 Hole	12" (19lb/ft)	9,890
102	40	22,000	2 x 10,000 lb	235/80R16 8 Hole	12" (19lb/ft)	10,000

*WEIGHT OF UNITS ARE APPROXIMATES ONLY AND SUBJECT TO CHANGE DEPENDING ON OPTIONS

FHG22 OPTIONAL FEATURES

CODE DESCRIPTION

- 10HS2 2 - 10,000 lb Electric Over Hydraulic Disc Axles
- 12ES2 2 - 12,000 lb Electric Brake Axles
- 12HS2 2 - 12,000 lb Electric Over Hydraulic Disc Brake
- 15ES2 2 - 15,000 lb Electric Brake Axles
- 15AS2 2 - 15,000 lb Air Ride Axles
- 10ES3 3 - 10,000 lb Electric Brake Axles
- 10HS3 3 - 10,000 lb Electric Over Hydraulic Brake Axles
- 12ES3 3 - 12,000 lb Electric Brake Axles
- 12HS3 3 - 12,000 lb Electric Over Hydraulic Brake Axles
- D96 9' Hydraulic Dove Tail with Cleats on OUTSIDE ONLY
- D97 9' Hydraulic Dove Tail with Cleats FULL TAIL
- D98 9' Hydraulic Dove SELF CLEANING OUTSIDE ONLY
- D99 9' Hydraulic Dove FULL SELF CLEANING
- D95 9' Hydraulic Dove Tail Blackwood OUTSIDE ONLY
- J56 2 - 12k Hydraulic Jacks*
- H72 6' Spread Axles

*If hydraulics is NOT equipped

CODE DESCRIPTION


- K21 12" Crossmembers (per ft)
- D60 Deck Over Neck
- T42 Additional Side Tool Box (ea.)
- J55 2 Speed Drop-Leg Jacks
- W91 Cold Weather Harness
- T21 17.5" x 6.75" Tire Upgrade (ea.)
- U30 Weld On Ratchet Track Only (per ft)
- U32 Weld On Ratchets Every 5' (per ft)
- U31 Weld On Track with Adjustable Ratchets Every 5'
- R90 Wireless Remote
- U52 Winch Plate 1/2" (in neck)
- T06 14-Ply 235/85 Tire Upgrade (ea.)



Blackwood Floor Option



Up to 15k Axles

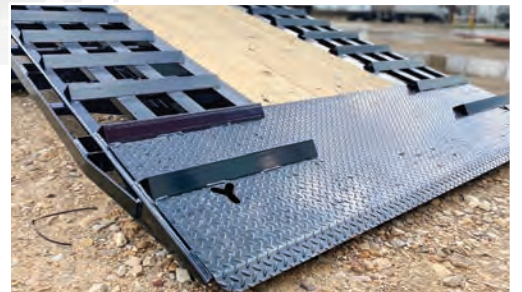

D98 Self Cleaning w/ Cleats Outside


5500 FM 38N, BROOKSTON, TX 75421

FLG22 MODEL

22k Gooseneck Low-Pro Equipment Trailer



IRONBULL
A NEW BREED OF TRAILERS

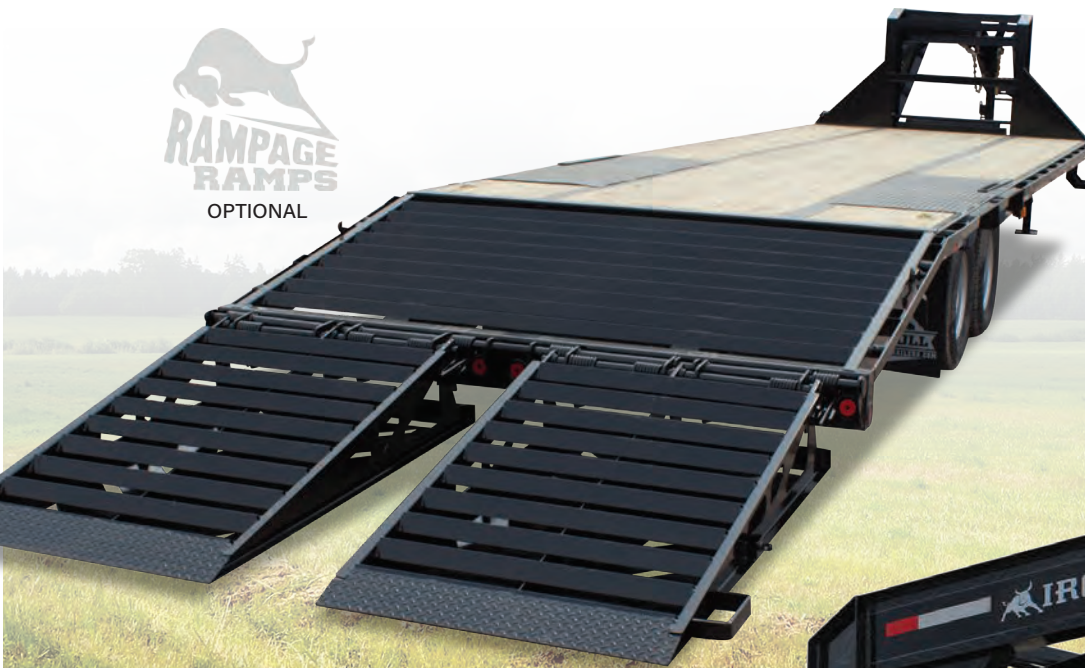

Iron Bull Goosenecks are some of the most rugged and longest lasting units in service today. Low-Pro, pierced frame design lowers the deck 3" providing a lower center of gravity, more stable cornering and a lower loading angle for equipment.



STANDARD FEATURES

- 12" I - Beam Frame and Neck (19 lbs/ft)
- 2 5/16" Adjustable Coupler
- 3" Structural Crossmembers
- 2.5 x 2.5 Front Bumper Rail
- Lockable Full Neck Width Tool Box
- Rub Rail, Stake Pockets & Pipe Spools
- Standard Torque Tube & Underframe Bridge
- HDSS Standard
- 2 - 10k Electric Brake Axles
- Multi-leaf Slipper Spring Suspension
- E-Z Lube Hubs
- 25" Gooseneck Box
- 8' Slide-in Ramps
- 2 - 10k Drop-Leg Jack
- Treated Pine 2" x 8" Floor
- 4 Standard 3" D-Rings
- Black Mod Wheels*
- 235/80R16 Radial Tires
- Spare Tire & Mount
- Lifetime LED Lighting
- All Lighting DOT Approved
- Molded Sealed Harness with Resistors
- 7-Way Receiver Female Plug with Adapter
- Powdura Powder Coat & One Cure Primer
- 33" Deck Height

BUILD A QUOTE ONLINE AT NORSTARCOMPANY.COM

GRAB A BULL BY THE HORNS

BASE SPECS

WIDTH	LENGTH	GVWR	AXLES	TIRE/WHEEL	FRAME	WEIGHT
102	20	22,000	2 x 10,000 lb	235/80R16 8 Hole	12" (19lb/ft)	6,300
102	22	22,000	2 x 10,000 lb	235/80R16 8 Hole	12" (19lb/ft)	6,600
102	24	22,000	2 x 10,000 lb	235/80R16 8 Hole	12" (19lb/ft)	6,920
102	25	22,000	2 x 10,000 lb	235/80R16 8 Hole	12" (19lb/ft)	7,310
102	26	22,000	2 x 10,000 lb	235/80R16 8 Hole	12" (19lb/ft)	7,410
102	28	22,000	2 x 10,000 lb	235/80R16 8 Hole	12" (19lb/ft)	7,640
102	30	22,000	2 x 10,000 lb	235/80R16 8 Hole	12" (19lb/ft)	7,855
102	32	22,000	2 x 10,000 lb	235/80R16 8 Hole	12" (19lb/ft)	8,105
102	34	22,000	2 x 10,000 lb	235/80R16 8 Hole	12" (19lb/ft)	8,350
102	36	22,000	2 x 10,000 lb	235/80R16 8 Hole	12" (19lb/ft)	8,675
102	38	22,000	2 x 10,000 lb	235/80R16 8 Hole	12" (19lb/ft)	8,900
102	40	22,000	2 x 10,000 lb	235/80R16 8 Hole	12" (19lb/ft)	9,200

*WEIGHT OF UNITS ARE APPROXIMATES ONLY AND SUBJECT TO CHANGE DEPENDING ON OPTIONS

FLG22 OPTIONAL FEATURES

CODE DESCRIPTION

10HS2	2 - 10,000 lb Electric Over Hydraulic Disc Axles
12ES2	2 - 12,000 lb Electric Brake Axles
12HS2	2 - 12,000 lb Electric Over Hydraulic Disc Brake
15ES2	2 - 15,000 lb Electric Brake Axles
15AS2	2 - 15,000 lb Air Ride Axles
10ES3	3 - 10,000 lb Electric Brake Axles
10HS3	3 - 10,000 lb Electric Over Hydraulic Brake Axles
12ES3	3 - 12,000 lb Electric Brake Axles
12HS3	3 - 12,000 lb Electric Over Hydraulic Brake Axles
D30	Rampage Ramps (2 - 40" Flip-Over Ramps w 5' Self Cleaning Dove)
D35	5' Self Cleaning Dove Tail with Slide-in Ramps
D31	5' Self Cleaning Dove Tail with 2 Flip-Over Ramps
D32	5' Self Cleaning Dove Tail with 3 Flip-Over Ramps
S01	Tube Rear Support Stands

CODE DESCRIPTION

J55	2 Speed Drop-Leg Jacks
J56	2 - 12k Hydraulic Jacks
H72	6' Spread Axles
K21	12" Crossmembers (per ft)
D60	Deck Over Neck
T42	Additional Side Tool Box (ea.)
W91	Cold Weather Harness
T21	17.5" x 6.75" Tire Upgrade (ea.)
U30	Weld On Ratchet Track Only (per ft)
U32	Weld On Ratchets Every 5' (per ft)
U31	Weld On Track with Adjustable Ratchets Every 5'
U52	Winch Plate 1/2" (in neck)
T06	14-Ply 235/85 Tire Upgrade (ea.)



Rampage Ramps



Triple Axle Configurations



2 - 12k Electric Brake Axles

Photos may include optional features.


5500 FM 38N, BROOKSTON, TX 75421

FLP22 MODEL

22k Deckover Pintle Trailer



IRONBULL
A NEW BREED OF TRAILERS

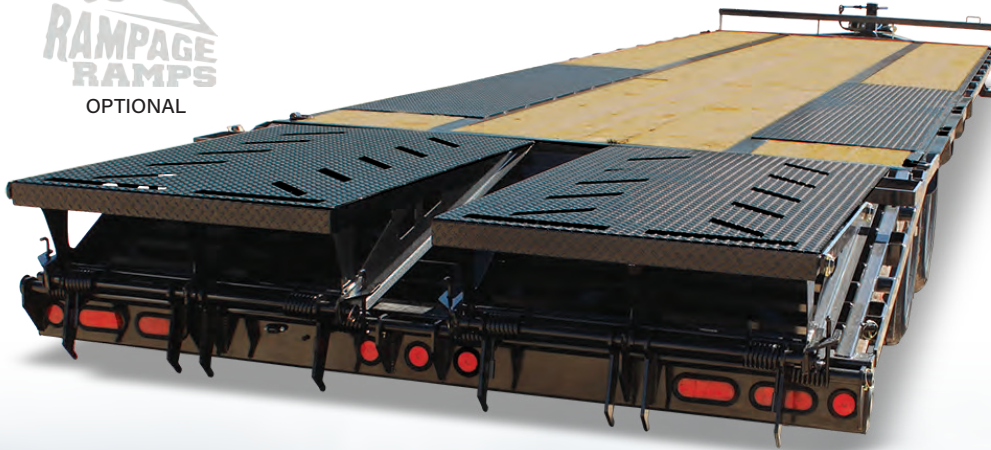

We designed our FLP22 Heavy Pintle with the idea of making things easier for the customer. With up to 3 15k axles, optional Rampage Ramps, 3" 60k pintle eye coupler and a self-cleaning dovetail, the FLP22 makes hauling even the heaviest machinery a smooth ride.



STANDARD FEATURES

- 12" I - Beam Frame (19 lbs/ft)
- 60k Pintle Eye Coupler
- 3" Structural Crossmembers
- 2.5 x 2.5 Front Bumper Rail
- Rub Rail, Stake Pockets & Pipe Spools
- Standard Torque Tube & Underframe Bridge
- Heavy Duty Suspension System Standard
- 2 - 10k Electric Brake Axles
- Multi-leaf Slipper Spring Suspension
- E-Z Lube Hubs
- 8' Slide-in Ramps
- 2 - 10k Drop-Leg Jacks
- Treated Pine 2" x 8" Floor
- 4 Standard 3" D-Rings
- Black Mod Wheels*
- 235/80R16 Radial Tires
- Lifetime LED Lighting
- All Lighting DOT Approved
- Molded Sealed Harness with Resistors
- 7-Way Receiver Female Plug with Adapter
- Powdura Powder Coat & One Cure Primer
- 33" Deck Height

BUILD A QUOTE ONLINE AT NORSTARCOMPANY.COM

GRAB A BULL BY THE HORNS

BASE SPECS

WIDTH	LENGTH	GVWR	AXLES	TIRE/WHEEL	FRAME	WEIGHT
102	20	22,000	2 x 10,000 lb	235/80R16 8 Hole	12" (19lb/ft)	6,270
102	22	22,000	2 x 10,000 lb	235/80R16 8 Hole	12" (19lb/ft)	6,456
102	24	22,000	2 x 10,000 lb	235/80R16 8 Hole	12" (19lb/ft)	6,550
102	25	22,000	2 x 10,000 lb	235/80R16 8 Hole	12" (19lb/ft)	6,656
102	26	22,000	2 x 10,000 lb	235/80R16 8 Hole	12" (19lb/ft)	6,770
102	28	22,000	2 x 10,000 lb	235/80R16 8 Hole	12" (19lb/ft)	6,856
102	30	22,000	2 x 10,000 lb	235/80R16 8 Hole	12" (19lb/ft)	7,056
102	32	22,000	2 x 10,000 lb	235/80R16 8 Hole	12" (19lb/ft)	7,256
102	34	22,000	2 x 10,000 lb	235/80R16 8 Hole	12" (19lb/ft)	7,456
102	36	22,000	2 x 10,000 lb	235/80R16 8 Hole	12" (19lb/ft)	7,656
102	38	22,000	2 x 10,000 lb	235/80R16 8 Hole	12" (19lb/ft)	7,856
102	40	22,000	2 x 10,000 lb	235/80R16 8 Hole	12" (19lb/ft)	8,156

*WEIGHT OF UNITS ARE APPROXIMATES ONLY AND SUBJECT TO CHANGE DEPENDING ON OPTIONS

FLP22 OPTIONAL FEATURES

CODE DESCRIPTION

10HS2	2 - 10,000 lb Electric Over Hydraulic Disc Axles
12ES2	2 - 12,000 lb Electric Brake Axles
12HS2	2 - 12,000 lb Electric Over Hydraulic Disc Brake
15ES2	2 - 15,000 lb Electric Brake Axles
15AS2	2 - 15,000 lb Air Ride Axles
10ES3	3 - 10,000 lb Electric Brake Axles
10HS3	3 - 10,000 lb Electric Over Hydraulic Brake Axles
12ES3	3 - 12,000 lb Electric Brake Axles
12HS3	3 - 12,000 lb Electric Over Hydraulic Brake Axles
D30	Rampage Ramps (2 - 40" Flip-Over Ramps w 5' Self Cleaning Dove)
D35	5' Self Cleaning Dove Tail with Slide-in Ramps
D31	5' Self Cleaning Dove Tail with 2 Flip-Over Ramps
D32	5' Self Cleaning Dove Tail with 3 Flip-Over Ramps

CODE DESCRIPTION

S01	Tube Rear Support Stands
J55	2 Speed Drop-Leg Jacks
H72	6' Spread Axles
K21	12" Crossmembers (per ft)
T42	Additional Side Tool Box (ea.)
T46	Tongue Mount Toolbox
W91	Cold Weather Harness
T21	17.5" x 6.75" Tire Upgrade (ea.)
U30	Weld On Ratchet Track Only (per ft)
U32	Weld On Ratchets Every 5' (per ft)
U31	Weld On Track with Adjustable Ratchets Every 5'
U50	Winch Plate (Floor)
T06	14-Ply 235/85 Tire Upgrade (ea.)



Photos may include optional features.

5500 FM 38N, BROOKSTON, TX 75421

FLP50 MODEL

Super HD Pintle Trailer



Heavy hauling just met its match with the FLP50. With up to a 50,000 GVWR, 102" deck width, up to 3 axles, coupled with a 14" I-Beam frame and 6" Junior I-Beam Crossmembers you'll be hard-pressed to find something this beast can't carry. Loading and unloading is half the battle, and we thought about that too with a 6' self-cleaning dove tail and HD spring assist ramps std., the FLP almost makes it look easy.



STANDARD FEATURES

- 14" (26lb/ft) I-Beam Frame
- 2" x 8" Treated Wood Floor
- Dual 2-Speed 25k Jacks
- 6' Dove Tail with Spring Assist Ramps
- 6" Jr. I-Beam Crossmembers
- Heavy Duty Suspension System
- 2 - 10k Electric Brake Axles
- Multi-leaf Slipper Spring Suspension
- E-Z Lube Hubs
- ABS on Front Axle
- 1" x 4" D-Rings
- Integrated Bumper Tie-Downs
- Black Mod Wheels*
- ST 215/75R17.5 LRH Radial Tires
- 60k Pintle Eye Coupler
- Lifetime LED Lighting
- All Lighting DOT Approved
- Molded Sealed Harness with Resistors
- 7-Way Semi-Style Plug
- Powdura Powder Coat & One Cure Primer
- 34" Deck Height

BUILD A QUOTE ONLINE AT NORSTARCOMPANY.COM

GRAB A BULL BY THE HORNS

BASE SPECS

WIDTH	LENGTH	GVWR	AXLES	TIRE/WHEEL	FRAME	WEIGHT
102	25	48,000	2 x 22,500 lb	ST 215/75R17.5 LRH	14" (26lb/ft)	7,095
102	26	48,000	2 x 22,500 lb	ST 215/75R17.5 LRH	14" (26lb/ft)	7,295
102	28	48,000	2 x 22,500 lb	ST 215/75R17.5 LRH	14" (26lb/ft)	7,495
102	30	48,000	2 x 22,500 lb	ST 215/75R17.5 LRH	14" (26lb/ft)	7,695
102	25	50,000	3 x 22,500 lb	ST 215/75R17.5 LRH	14" (26lb/ft)	8,995
102	26	50,000	3 x 22,500 lb	ST 215/75R17.5 LRH	14" (26lb/ft)	10,295
102	28	50,000	3 x 22,500 lb	ST 215/75R17.5 LRH	14" (26lb/ft)	10,495
102	30	50,000	3 x 22,500 lb	ST 215/75R17.5 LRH	14" (26lb/ft)	10,695

*WEIGHT OF UNITS ARE APPROXIMATES ONLY AND SUBJECT TO CHANGE DEPENDING ON OPTIONS

FLPSO OPTIONAL FEATURES

CODE	DESCRIPTION
AR1	Air Ride
AL1	Air Ride with Lift Axle
T48	Oversized Tongue Mount Toolbox
T24	18-Ply Tire Upgrade
J56	2 - 12k Hydraulic Jacks
D27	Hydraulic Ramps



Photos may include optional features.

5500 FM 38N, BROOKSTON, TX 75421

FXG22 MODEL

22k Tandem Dual Deckover



Tandem Duals



12" 19lb I-Beam Neck

Norstar Gooseneck Trailers deliver the same quality, usability and reliability as you've come to expect from IronBull. Decades of experience contributed to create one of the most durable trailers available on the market today. Norstar Goosenecks are built to haul and get you there and back again and again.



STANDARD FEATURES

- 2 - 10,000 Lb Electric Brake Axles
- 12" 19lb I-Beam Frame & Neck
- 6" Channel Side Rail
- 16" Crossmembers (3" 3.5lb C-channel)
- 5 1/2" Torque Tube
- 102" X 5' Self Cleaning Dove Tail w/ Rampage Ramps
- Under Frame Bridge
- Front Tool Box
- Rub Rails w/Stake Pockets & Pipe Spools
- 2-5/16" Gooseneck Coupler Adjustable Rd. 25K
- Treated Wood Floor
- Spring Loaded Drop Leg Jack 2-10K
- D-Rings 3" x 5/8" Weld On (4 ea)
- ST235/80 R16 LRE 10 Ply. (Dual)
- Spare Tire ST235/80 R16 LRE 10 Ply. (Dual)
- Mud Flaps with Norstar Logo (Dual Tires)
- Standard Wire Harness
- New Diamond Plate Steps
- Primer and Black Powder Coat
- One Year Warranty
- 32" Deck Height

BUILD A QUOTE ONLINE AT NORSTARCOMPANY.COM

GRAB A BULL BY THE HORNS



Front Toolbox Between Neck



Spare Tire (Standard On Tandem Duals)

FXG SIZES

Model	Weight
FXG0225102	6,790
FXG0226102	6,962
FXG0228102	7,297
FXG0230102	7,606
FXG0232102	7,893
FXG0234102	8,179
FXG0236102	8,400
FXG0238102	8,708
FXG0240102	8,995



Rampage Ramps



LED Lighting

5500 FM 38N, BROOKSTON, TX 75421



TILT TRAILERS

DESIGNED FOR HAULING VEHICLES WITH LOW GROUND CLEARANCE FOR NO HASSLE LOADING AND UNLOADING.

Go full tilt with your trailering! Our quality craftsmanship and extended range of optional features makes our tilt trailers the best on the market. IronBull gravity tilt decks offer a great alternative to ramps, steep loading angles and possible hang up points of traditional flat deck units.





Pg. 52

TWB

Mini-Beam Tilt

- 18 - 22' Lengths
- 14,000 lbs GVWR



Pg. 54

TLB

Low Pro Bumper Tilt

- 16 - 26' Lengths
- 10,000 - 14,000 lbs GVWR



Pg. 56

TDP

Deckover Pintle Tilt

- 22 - 30' Lengths
- 14,000 lbs GVWR

TWB MODEL

Mini-Beam Tilt Trailer



IRONBULL
A NEW BREED OF TRAILERS

GO FULL TILT!
WITH TOP-TIER CRAFTSMANSHIP, THIS
NEW TILT BULL GIVES THE ABILITY TO
HANDLE HEAVY LOADS EFFORTLESSLY



MINI BEAM TILT



We have a new Bull on the market! It's our 8" I-Beam 102 wide tilt equipment hauler. Iron Bull Gravity Tilt Decks offer a great alternative to ramps, steep loading angles and possible hang up points of traditional flat deck units. 14,000 lbs of gross vehicle weight rating ensures you have enough capacity for your heaviest loads, as well as expert craftsmanship combined with top-tier components will ensure you have an effortless tow. It's a great fit for work and play.



STANDARD FEATURES

- 8" 10 lb I Beam Frame
- 27" Deck Height
- 14 Degree Tilt Angles
- 14k GVWR
- 4400 lbs est Weight (20') Gravity Tilt
- The Beefy Toolbox
- 2 - 7,000 lb Torsion Axles
- Cambered Torsion Axles
- 2 5/16" Adjustable Coupler
- 3" Structural Crossmembers
- Knife Edge Tail (1/4" Diamond Plate)
- Removable Diamond Plate Fenders
- Rub Rail and Stake Pockets
- 10k Drop-Leg Jack
- 6 Standard 3" D-Rings
- Radial Tires
- E-Z Lube Hubs
- Black Mod Wheels*
- 3" x 10" Cylinder with 1.5" Shaft
- Multi-Leaf Slipper Spring Suspension
- Treated Pine Floor
- Lifetime LED Lighting
- All Lighting DOT Approved
- Molded Sealed Harness with Resistors
- 7-Way Receiver Female Plug with Adapter
- Powdura Powder Coat & One Cure Primer

BUILD A QUOTE ONLINE AT NORSTARCOMPANY.COM

GRAB A BULL BY THE HORNS



BASE SPECS

WIDTH	LENGTH	GVWR	AXLES	TIRE/WHEEL	STATIONARY	WEIGHT
83/02	18	14,000	2 X 7,000 lb	235/80R16 8 Hole	2'	
83/02	20	14,000	2 X 7,000 lb	235/80R16 8 Hole	4'	4400
83/02	22	14,000	2 X 7,000 lb	235/80R16 8 Hole	6'	

*WEIGHT OF UNITS ARE APPROXIMATES ONLY AND SUBJECT TO CHANGE DEPENDING ON OPTIONS

TWB OPTIONAL FEATURES

CODE	DESCRIPTION
E02	Steel Floor (per ft)
08ES2	Tandem 8k Axles
A36	Full Deck Tilt (Power Included)
T06	14-Ply 235/85 Tire Upgrade (ea.)
02	102" Wide Deck (83" Between Fenders)
K21	12" Crossmembers (per ft)
E03	Blackwood Floor
W91	Cold Weather Harness
U50	Winch Plate (Floor)




Knife Edge Tail



83" or 102" Wide



Updated Latch

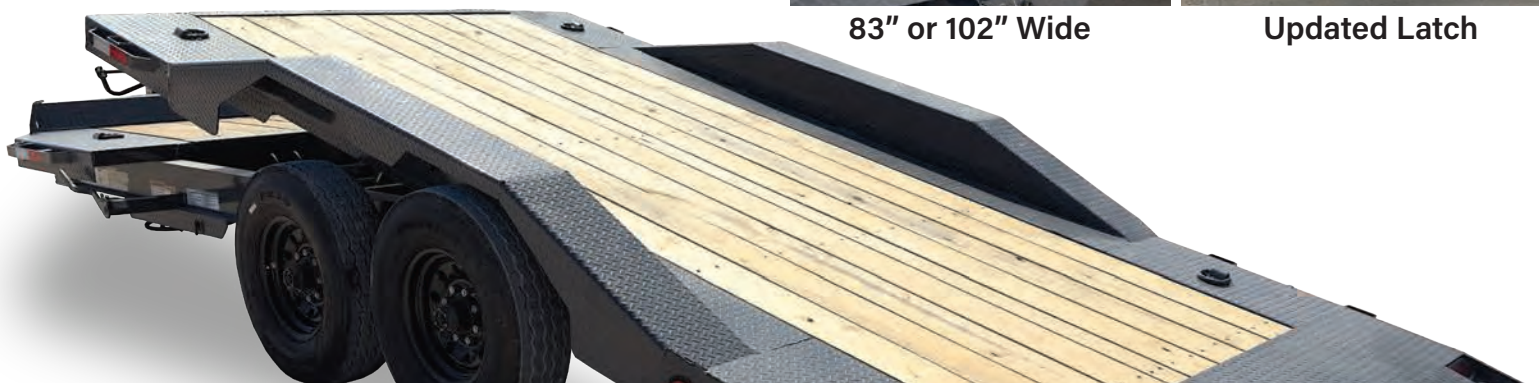

5500 FM 38N, BROOKSTON, TX 75421

TLB MODEL

Low-Pro Tilt Trailer



102" Wide Deck Available



Gooseneck Available

Our 83" wide 14k bumper pull is by far our most popular tilt model. With two 7k axles, tons of standard features and the option between gravity and power tilt, this model is a perfect fit for the contractor or weekend warrior.



STANDARD FEATURES

- 6" Channel Tongue (8.2 lbs/ft)
- 2 - 5200 or 7000 lb Torsion Axles
- 2 - 5/16" Adjustable Coupler
- 3" Structural Crossmembers
- 20" Deck Height
- 11 Degree Loading Angle
- Knife Edge Tail (1/4" Diamond Plate)
- Removable Diamond Plate Fenders

- Rub Rail and Stake Pockets
- 10k Drop-Leg Jack
- 4 Standard 3" D-Rings
- Radial Tires (sizes on p.67)
- E-Z Lube Hubs
- Black Mod Wheels*
- 3" x 10" Cylinder with 1.5" Shaft
- Cambered Torsion Axles

- Multi-leaf Slipper Spring Suspension
- 2" x 8" Treated Pine Floor
- Lifetime LED Lighting
- All Lighting DOT Approved
- Molded Sealed Harness with Resistors
- 7-Way Receiver Female Plug with Adapter
- Powdura Powder Coat & One Cure Primer
- 20" Deck Height

BUILD A QUOTE ONLINE AT NORSTARCOMPANY.COM

GRAB A BULL BY THE HORNS

BASE SPECS


WIDTH	LENGTH	GVWR	AXLES	TIRE/WHEEL	STATIONARY	WEIGHT
83	16	9,990	2 x 5,200 lb	225/75R16 6 Hole	0' (Power Tilt Only)	3,200
83	18	9,990	2 x 5,200 lb	225/75R16 6 Hole	2'	3,400
83	20	9,990	2 x 5,200 lb	225/75R16 6 Hole	4'	3,500
83	22	9,990	2 x 5,200 lb	225/75R16 6 Hole	6'	3,600
83	18	14,000	2 x 7,000 lb	235/80R16 8 Hole	2'	3,700
83	20	14,000	2 x 7,000 lb	235/80R16 8 Hole	4'	3,800
83	22	14,000	2 x 7,000 lb	235/80R16 8 Hole	6'	4,000
83	24	14,000	2 x 7,000 lb	235/80R16 8 Hole	8'	4,200
83	26	14,000	2 x 7,000 lb	235/80R16 8 Hole	10'	4,400

*WEIGHT OF UNITS ARE APPROXIMATES ONLY AND SUBJECT TO CHANGE DEPENDING ON OPTIONS

TLB OPTIONAL FEATURES

CODE DESCRIPTION

- V58 Power Up/Power Down
- A36 Full Deck Tilt (Power Included)
- 02 102" Wide Deck (83" Between Fenders)
- 07ET3 Third Torsion Axle (Three Electric Brakes)
- 08ES2 Tandem 8k Axles
- K21 12" Crossmembers (per ft)
- E02 Steel Floor (per ft)
- E03 Blackwood Floor
- W91 Cold Weather Harness
- T46 Front Tool Box (Gravity Only)
- T06 14-Ply 235/85 Tire Upgrade (ea.)
- U50 Winch Plate (Floor)

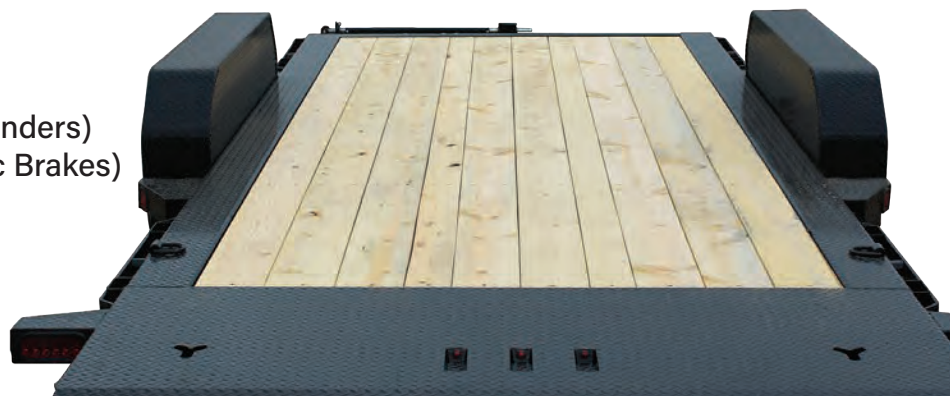


Knife Edge Tail



Full Power Tilt



Blackwood Flooring

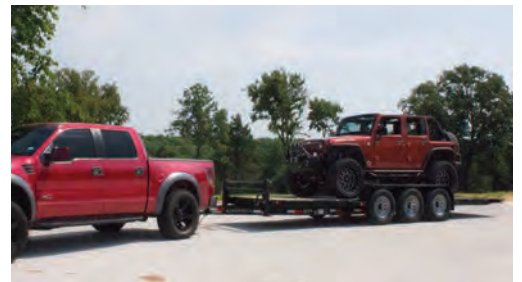

Three 7k Axles



Photos may include optional features.

5500 FM 38N, BROOKSTON, TX 75421

TDP14 MODEL

14k Deckover Tilt Pintle Trailer



Our TDP14 Deckover features an 8" I-Beam tongue and frame, 14k GVWR and dual hydraulic cylinders with optional scissor. The TDP is built to deliver maximum performance and versatility.



(Also Available in Gooseneck)

STANDARD FEATURES

- 8" I-Beam Frame (10 lbs/ft)
- 2 5/16" Adjustable Coupler
- 3" Structural Crossmembers
- 4" Tube Frame Runners
- Rub Rail, Stake Pockets & Pipe Spools
- Cambered Spring Axles
- Multi-leaf Slipper Spring Suspension
- E-Z Lube Hubs
- 2 Electric Brake Axles
- 10k Drop-Leg Jack
- Treated Pine 2" x 8" Floor
- 4 Standard 3" D-Rings
- Black Mod Wheels*
- 235/80R16 Radial Tires
- Lifetime LED Lighting
- All Lighting DOT Approved
- Molded Sealed Harness with Resistors
- 7-Way Receiver Female Plug with Adapter
- Powdura Powder Coat & One Cure Primer
- 33" Deck Height

BUILD A QUOTE ONLINE AT NORSTARCOMPANY.COM

GRAB A BULL BY THE HORNS

BASE SPECS

WIDTH	LENGTH	GVWR	AXLES	TIRE/WHEEL	FRAME	WEIGHT
102	22	14,000	2 x 7,000 lb	235/80R16 8 Hole	8" I-Beam	4,300
102	24	14,000	2 x 7,000 lb	235/80R16 8 Hole	8" I-Beam	4,800
102	26	14,000	2 x 7,000 lb	235/80R16 8 Hole	8" I-Beam	5,170
102	28	14,000	2 x 7,000 lb	235/80R16 8 Hole	8" I-Beam	5,370
102	30	14,000	2 x 7,000 lb	235/80R16 8 Hole	8" I-Beam	5,680


*WEIGHT OF UNITS ARE APPROXIMATES ONLY AND SUBJECT TO CHANGE DEPENDING ON OPTIONS

TOPI4 OPTIONAL FEATURES

102" FULL DECK WIDTH

CODE	DESCRIPTION
07ES3	Third Spring Axle (Three Electric Brakes)
08ES2	Tandem 8k Axles
J58	Hydraulic 12k Jack*
E02	Steel Floor (per ft)
E03	Blackwood Floor
K21	12" Crossmembers (per ft)
E01	3" Adjustable Pintle Ring
T01	Weld on Spare Tire Mount
R01	Winch Plate 1/2" (in floor)
W91	Cold Weather Harness

*if hydraulics is equipped

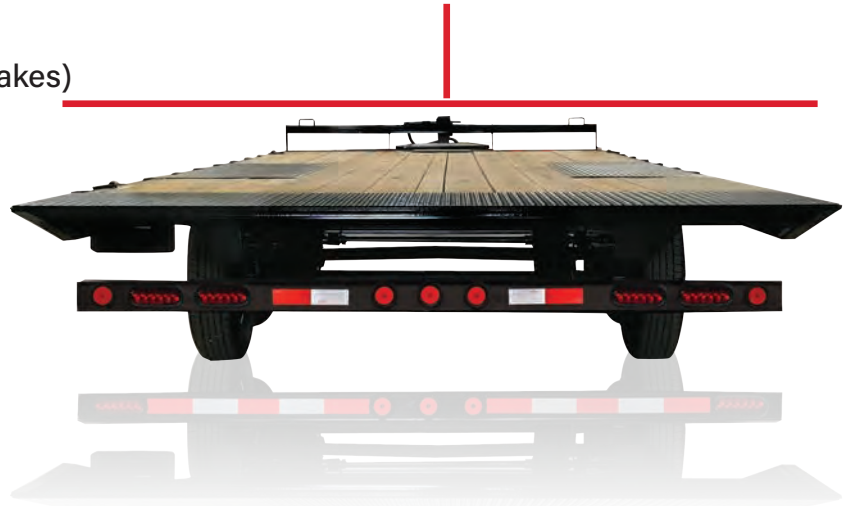

Photos may include optional features.


5500 FM 38N, BROOKSTON, TX 75421



UTILITY TRAILERS

WITH THEIR STURDY CONSTRUCTION AND AMPLE STORAGE SPACE, UTILITY TRAILERS ARE VALUABLE FOR HOMEOWNERS, LANDSCAPERS, AND SMALL BUSINESS OWNERS.

We are the leading manufacturer of high-quality utility trailers designed to meet the unique needs of our customers. A utility trailer can be a game-changer when completing tasks and transporting cargo. With us, you can rest assured that you're getting a high-quality, durable, and versatile trailer that will provide years of reliable use.

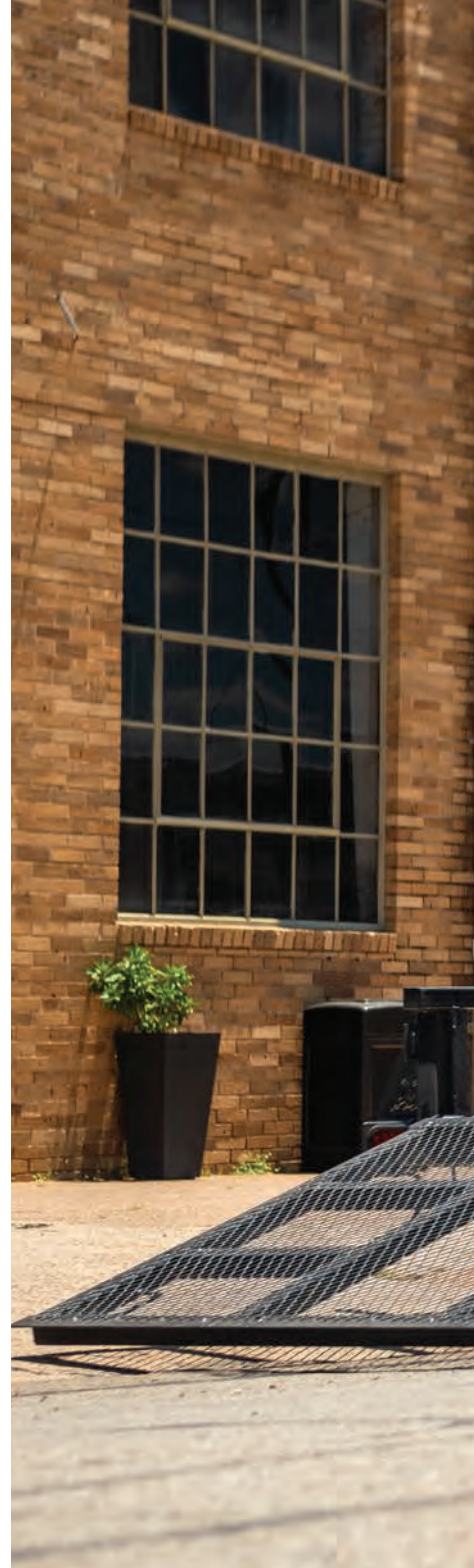




Pg. 60

UTB03

Single Axle Utility

• 12 - 14' Lengths

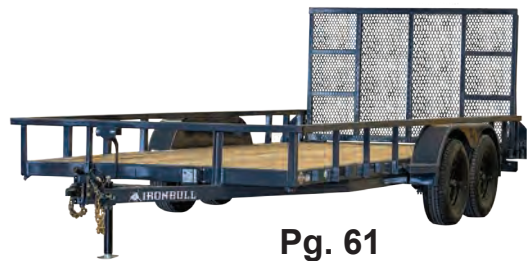

Pg. 61

UTB07

Tandem Axle Utility

• 14 - 18' Lengths

UTB03 MODEL



14k Deckover Tilt Pintle Trailer

STANDARD FEATURES


- 1 - 3500 lb Axle (Idler)
- Channel 4" x 4.5 lbs Frame & Tongue
- Angle 2.5" x 2.5" X 3/16" Crossmembers
- Tube 2" x 4" x 1/8" Rear Bumper
- Straight Deck (Std.)
- Tube Top Rail (Tube 2" x 2" x 1/8")
- 4" Tail Gate w/ Springs (Tube 2" x 2" X 1/8" & Angle 2 1/2" x 2 1/2" x 3/16")
- Self-Retained Gate Pins
- Spring 7/16" wire
- DP Fender Step
- 2" A-Frame Coupler
- Jack Swivel Topwind 5k
- Teardrop Single Fender
- Treated Wood Floor
- C- Formed Front Bumper (Std.)
- Standard Wire Harness & 3/4" Lights
- Stake Pockets
- Tie Downs
- ST205/75 R15 (D) 8Ply
- Spare Tire Mount
- Grey
- 23" Deck Height

Taking the field by storm is the Iron Bull UTB. Our beefed up utility trailer packs a serious punch and is available in single or tandem axle configurations with the same heavy duty build that you have come to expect to get from Iron Bull.



AVAILABLE SIZES

- Single Axle UTB03
- 83" x 12'
- 83" x 14'

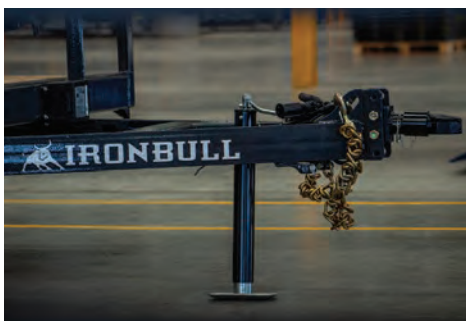

Adjustable Coupler



4' Fold-In Gate



Fully LED Lighting With Fold-In Gate

BUILD A QUOTE ONLINE AT NORSTARCOMPANY.COM

GRAB A BULL BY THE HORNS

7K Utility Trailer

AVAILABLE SIZES

Tandem Axle UTB07
83" x 14'
83" x 16'
83" x 18'



Lengths - 14, 16 & 18

STANDARD FEATURES

- 2 - 3500 Lb Axles (1 Elec Brake & 1 Idler)
- Channel 4" x 4.5LBS Frame & Tongue
- Angle 2.5" x 2.5" x 3/16" Crossmembers
- Tube 2" x 4" x 1/8" Rear Bumper
- Straight Deck (Std.)
- Tube Top Rail (Tube 2" x 2" x 1/8")
- 4" Tail Gate w/ Springs (Tube 2" x 2" x 1/8" & Angle 2 1/2" x 2 1/2" x 3/16")
- Self-Retained Gate Pins
- Spring 7/16" wire
- DP Fender Step
- Bumper Pull Adj 7k Coupler
- Jack Swivel Topwind 5k
- Teardrop Tandem Fender
- Treated Wood Floor
- C- Formed Front Bumper (Std.)
- Standard Wire Harness & 3/4" Lights
- Stake Pockets
- Tie Downs
- ST205/75 R15 (D) 8Ply
- Spare Tire Mount
- Grey
- Available 2nd Brake Axle
- 23" Deck Height



2" x 2" Top Tube Rail



Teardrop Tandem Fender



C-Formed Front Bumper

5500 FM 38N, BROOKSTON, TX 75421

SIDE EXTENSIONS

CODE	DESCRIPTION
S43505552	24" Side Extensions 83" x 12'
S43505550	24" Side Extensions 83" x 14'
S43505551	24" Side Extensions 83" x 16'

CODE	DESCRIPTION
S43505553	24" Side Extensions 60" x 10'
S43505554	24" Side Extensions 72" x 10'
S43505555	24" Side Extensions 72" x 12'



JACKS


CODE	DESCRIPTION
S43002023BK	Hydraulic 7k Jack Kit
S43002009BK	Gooseneck Hydraulic 12k Jack Kit
S43002033BK	Bumper Pull Hydraulic 12k Jack Kit
S43002030	Gooseneck 2-speed Jack Kit
S43002005	10k Gooseneck RH Jack
S43002004	10k Gooseneck LH Jack
S43002003	7k Jack, Bolt-On
S43002002	10k Jack - DTB/DWB/EWB/FDP
S43002001	10k Jack - ETB/TLB
300200015	Jack Handle

COLD WEATHER WIRING HARNESES

CODE	DESCRIPTION
301300081	Bumper Pull Dump Trailers
301300083	Gooseneck Dump Trailers
301300085	Gooseneck Flat Bed Trailers
301300089	Bumper Pull Flat Bed Trailers

FRONT HARNESES

CODE	DESCRIPTION
301300002	Dump / Power Tilt Bumper Pull Front Harness
301300023	Dump Gooseneck Front Harness
301300015	Equipment & Gravity Tilt Bumper Pull Front Harness
301300084	Gooseneck Flat Bed Front Harness

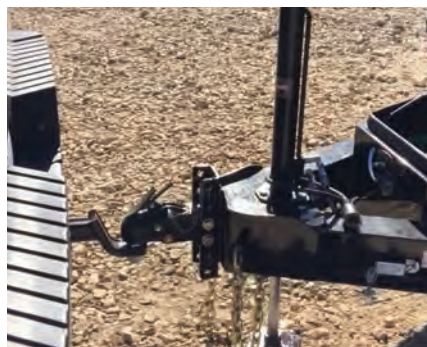

7k Hydraulic Jack



12k Hydraulic Jack



Cold Weather Harness

DEALER PRICING AVAILABLE AT NORSTARPARTS.COM

HYDRAULICS

CODE	DESCRIPTION	CODE	DESCRIPTION
301400031	2-way Hydraulic Pump	301300185	Universal Wireless Remote - Eagle Hydraulics
301400034	4-way Hydraulic Pump	301300093	KTI 15' Remote Extensions Cable
301300090	KTI 2-Button Wireless Remote	301400033	KTI Solenoid
301300101	KTI 4-Button Wireless Remote	301400040	KTI Solenoid - Molded Coils & Remote Attachment
301300110	KTI Wireless 2-Button Remote w/ Bluetooth	301300016	5amp Charger
301300103	KTI Wired 2-Button Remote	301300131	10amp Super Charger - Charge while driving
301300111	KTI Wired 4-Button Remote	301300132	Solar Panel Charger

ADD-ONS

CODE	DESCRIPTION	CODE	DESCRIPTION
300100003	Coupler 2-5/16"	301300163	Winch with Steel Cable 20,000 Lbs
300100002	Coupler 2"	250170038	Winch Plate
300100002	Gooseneck Coupler, 2-5/16" 25K	250170065	Winch Plate for Gooseneck - RAW
300100009	Gooseneck Coupler, 2-5/16" 30K	300200011	Rear Stabilizer Jack for Equipment Trailers
303400001	Gooseneck Shocker Hitch	S43002510	Rear Support Stands for Dump Trailers
303400002	Bumper Pull Shocker Hitch - 2" Receiver Tube	302900010	6' Sliding Track for Ratchet Winch
303400003	Bumper Pull Shocker Hitch - 2-1/2" Receiver Tube	302900011	4" Ratchet Winch --- Sliding Track or Weld
300100015	Universal Coupler Lock	302900012	4" Strap w/ Flat Hook
300100017	Gooseneck Coupler Lock	S43006001	Bolt on/Weld on Spare Mount
300100018	Gooseneck Setscrew Lock	S43006003	Front Bumper Spare Mount
300400003	Mud Flap Iron Bull Tandem Axle Dual Wheel	S43006002	Stake Pocket Spare Mount
300400004	Mud Flap Iron Bull Tandem Axle Single Wheel		

TOOLBOXES

CODE	DESCRIPTION	CODE	DESCRIPTION
S43004004BK	Butterfly Toolbox	S43610630BK	16H x 20D x 48L Side Mount Toolbox
S43004015BK	Secondary Tongue Mount Toolbox	S43004027BK	Gooseneck Style Top Open Angled Toolbox
S43004006GY	DWB Large Tongue Mount Toolbox	S43004007GY	EWB Large Tongue Mount Toolbox
S43004007GY	EWB Large Tongue Mount Toolbox	S43011010BK	96" Dunnage Rack
S43004034BK	DTB Large Tongue Mount Toolbox	S43004047BK	99" Dunnage Rack
S43610400BK	16H x 20D x 30L Side Undermount Toolbox	S43004046BK	Winch Toolbox
S43004037BK	16H x 12D x 30L Side Mount Toolbox	S43011011BK	Chain Rack

TIRES & WHEELS (available in silver or mod as well)

CODE	DESCRIPTION	CODE	DESCRIPTION
300300002	205/75R15 8ply Black Mod	300300014	235/85R16 14ply Black Mod
300300003	225/75R15 8ply Black Mod	300300011	235/85R16 14ply Dual Black Mod
300300001	235/80R16 10ply Black Mod	300300012	215/75R17.5 16ply Dual Black Mod
300300000	235/80R16 10ply Dual Black Mod	300300019	235/75/R17.5 18ply Super Single

DEALER PRICING AVAILABLE AT NORSTARPARTS.COM



IRONBULL

**GRAB A BULL
BY THE HORNS**