

BASE SPECS

WIDTH	LENGTH	GVWR	AXLES	TIRE/WHEEL	WEIGHT
83	14	7,000	2 x 3,500 lb	ST205/75R-15 LRD	1,817
83	16	7,000	2 x 3,500 lb	ST205/75R-15 LRD	1,927
83	18	7,000	2 x 3,500 lb	ST205/75R-15 LRD	2,059

*WEIGHT OF UNITS ARE APPROXIMATES ONLY AND SUBJECT TO CHANGE DEPENDING ON OPTIONS



83" _____ **14' - 18'** _____ **7,000 lbs** _____ **4,941 - 5,183 lbs**
 Deck Width Deck Lengths GVWR Load Capacity

STANDARD FEATURES


- 2 - 3500 Lb Axles (1 Elec Brake & 1 Idler)
- ST205/75 R15 (D) 8Ply
- Channel 4" x 4.5LBS Frame & Tongue
- Angle 2.5" x 2.5" x 3/16" Crossmembers
- Tube 2" x 4" x 1/8" Rear Bumper
- Straight Deck (Std.)
- Tube Top Rail (Tube 2" x 2" x 1/8")
- 4' Fold-In Gate
- Treated Wood Floor
- 4" Tail Gate w/ Springs (Tube 2" x 2" x 1/8" & Angle 2 1/2" x 2 1/2" x 3/16")
- Self-Retained Gate Pins
- Spring 7/16" wire
- DP Fender Step
- Bumper Pull Adj 7k Coupler
- Jack Swivel Topwind 5k
- Teardrop Tandem Fender
- C- Formed Front Bumper (Std.)
- Standard Wire Harness & 3/4" Lights
- Stake Pockets
- Tie Downs
- Spare Tire Mount
- Grey
- Available 2nd Brake Axle
- 22" Deck Height



2" x 2" Top Tube Rail



Tear Drop Tandem Fender

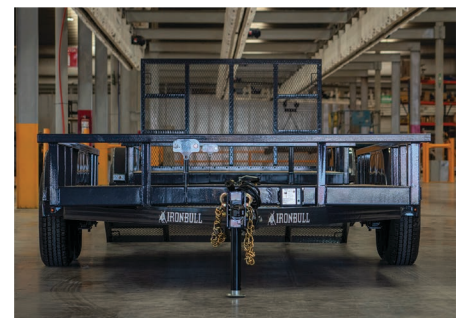

C-Formed Front Bumper

WHERE DURABILITY MEETS AFFORDABILITY